

# ДИАГНОСТИКА ТРУБОПРОВОДОВ, СОСУДОВ И ЗАПОРНОЙ АРМАТУРЫ

Выполнили: Беднягин Кирилл,  
Мастерских Виолетта и Сафонова Надежда









Microsoft Excel

File Edit Formula Format Data Options Macro Window Help


Normal

K4

PTCVG.XLS

	A	B	C	D	E	G	H	I	J	K
1	<b>VPAC GAS LEAK CALCULATION--PHYSICAL ACOUSTICS</b>									
2	N.B. The signal level to be entered is the reading on the LCD display of the 5 Data Entry Form VPAC-1									
3	Fluid density is used only in the calculation of tonnes/year. Complete B-H+I for t/yr.									
4	Fax completed data sheet to PAL on +44 (0)1954 231102 Contact: _____									
5	COMPANY: XXX Refining			LOCATION: Unit 2b			Date: 09/02/95			
6	Test	Valve	Signal	Pressure	Inlet	Gate	Ball	Fluid	Leak	Loss
7	Point	I.D.	Level	Difference	Size	Valve	Valve	Density	Rate	
8			(dB)	(barg)	(ins NB)	(y/n)	(y/n)	(kg/m <sup>3</sup> )	(l/min)	(Tonnes/yr)
9	e.g									
10	1	PRC 401B	29	1	6.0	N	N	1.25	13.5	8.884
11	2	SV 411	16	25	4.0	N	N	1.25	0.9	0.624
12	3	SV 412B	15	21	4.0	N	N	1.25	0.9	0.591
13	4	SV 412A	16	21	4.0	N	N	1.25	1.0	0.656
14	5	D 207	14	21	2.0	N	N	1.25	0.4	0.278
15	6	SV 255	15	21	2.0	N	N	1.25	0.5	0.309
16	7	D 206	13	21	2.0	N	N	1.25	0.4	0.251
17	8	D 202	86	17	4.0	N	N	1.25	1571.9	1032.726
18	9	D 204	13	21	4.0	N	N	1.25	0.7	0.480

Ready

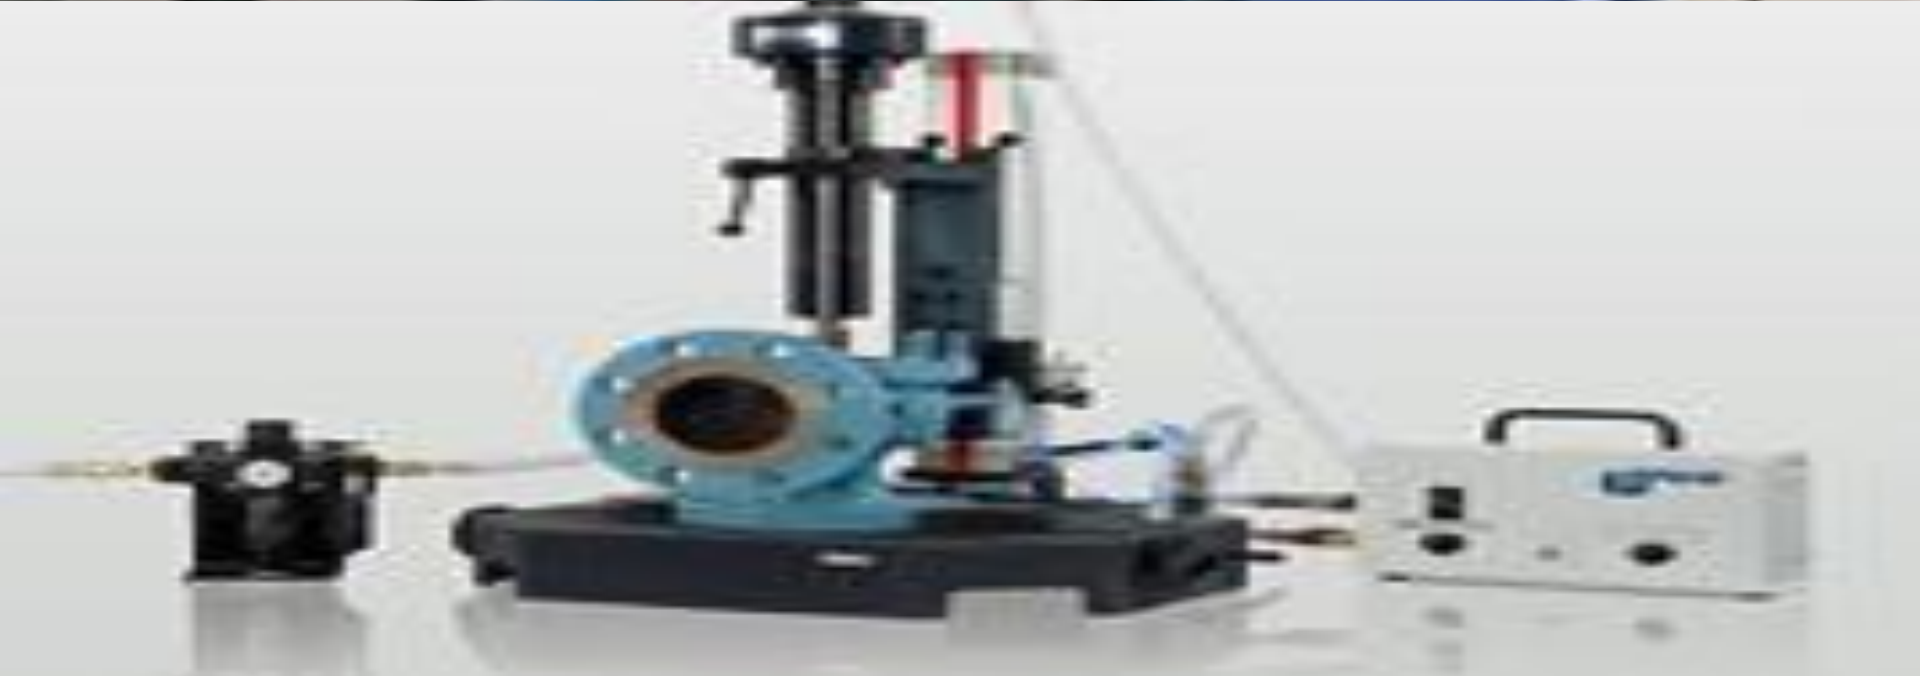



Спасибо за внимание!