

# Lenovo erasure Google account SOP for S1La40

MBG WW Service Technical Support

---

Lenovo<sup>™</sup>



# Environment

| NO. | Device        | Qua. | Remark   |
|-----|---------------|------|--|
| 1   | Computer      | 1    | CPU 1.7GHz or above, 512M ram or above, Windows XP or win7 system. |
| 2   | Driver        | 1    | Huaqin Android Driver All-in-One.rar                               |
| 3   | Download Tool | 1    | hq_AL817_customdownload_V1.2_160120_SpecialImg                     |
| 4   | USB Cable     | 1    | USB Cable  |



# Preparation

- Unzip the user software.
- Create a new folder named "Rework-Secro" in the bottom of the user software.
- Copy the MT6753\_Android\_scatter file which in user software and the secro-sign.img file into the new "Rework-Secro" folder.
- Make sure that the device is power off.


# Preparation: Driver Installation

Unzip the compression package:  
Huaqin Android Driver All-in-One.rar

According to computer operating system bits, select to run **Huaqin Android Driver All-in-One 32 bit V1.00.exe** or **Huaqin Android Driver All-in-One 64 bit V1.00.exe**, the installation procedure as follows:

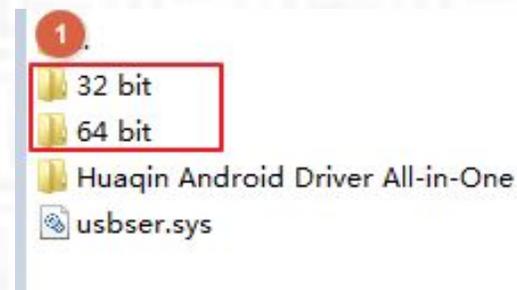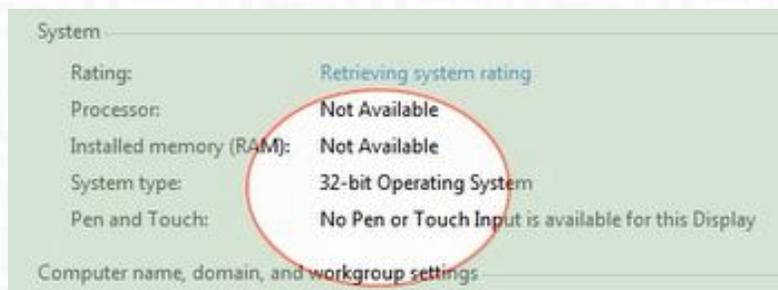

# Preparation: Driver Installation

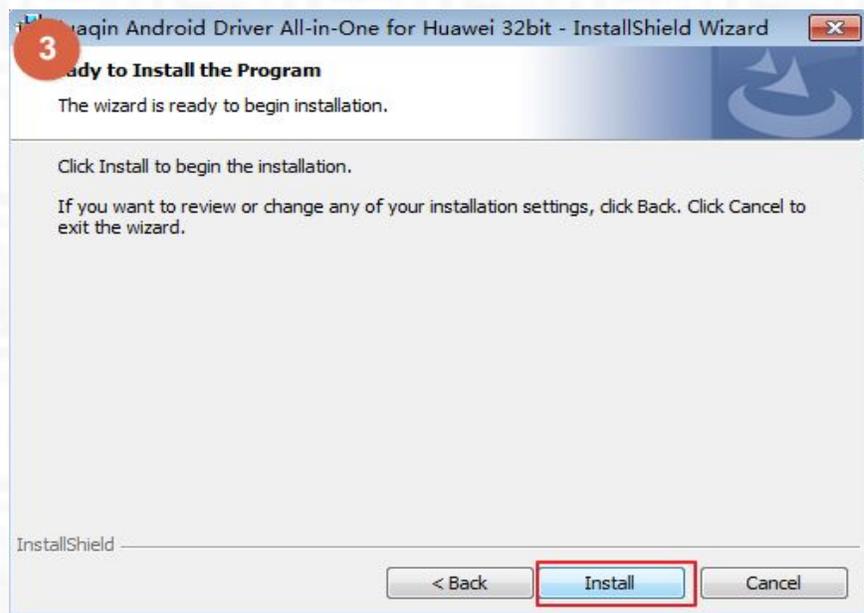

The first installation will show the following dialog box, please click "Install this driver software anyway", which will popup many times.



# Preparation: Driver Installation

After the installation completed, restart the computer to make the drivers take effect.




# Software Flashing SOP

Unzip the compression package: **hq\_AL817\_customdownload\_V1.2\_160120\_SpecialImg.**


According to the following order installation:

1. Run **MultiPortDownload.exe.**
2. Click **OK;**

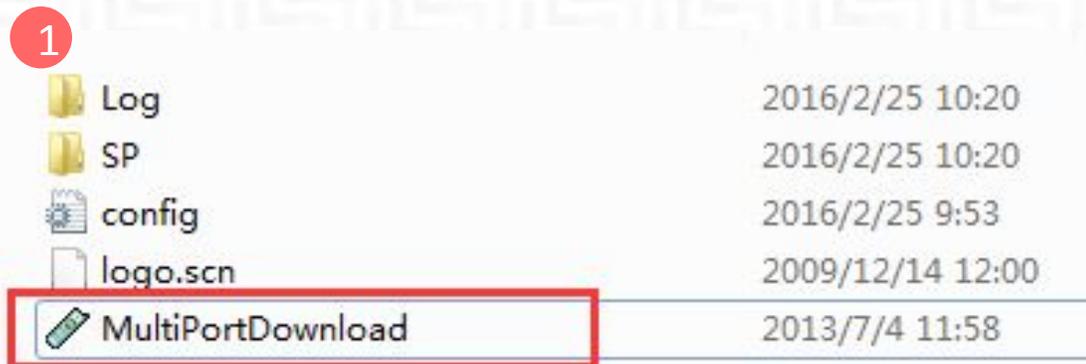


# Software Flashing SOP

3. Click **Select File**, select the scatter file in user software.

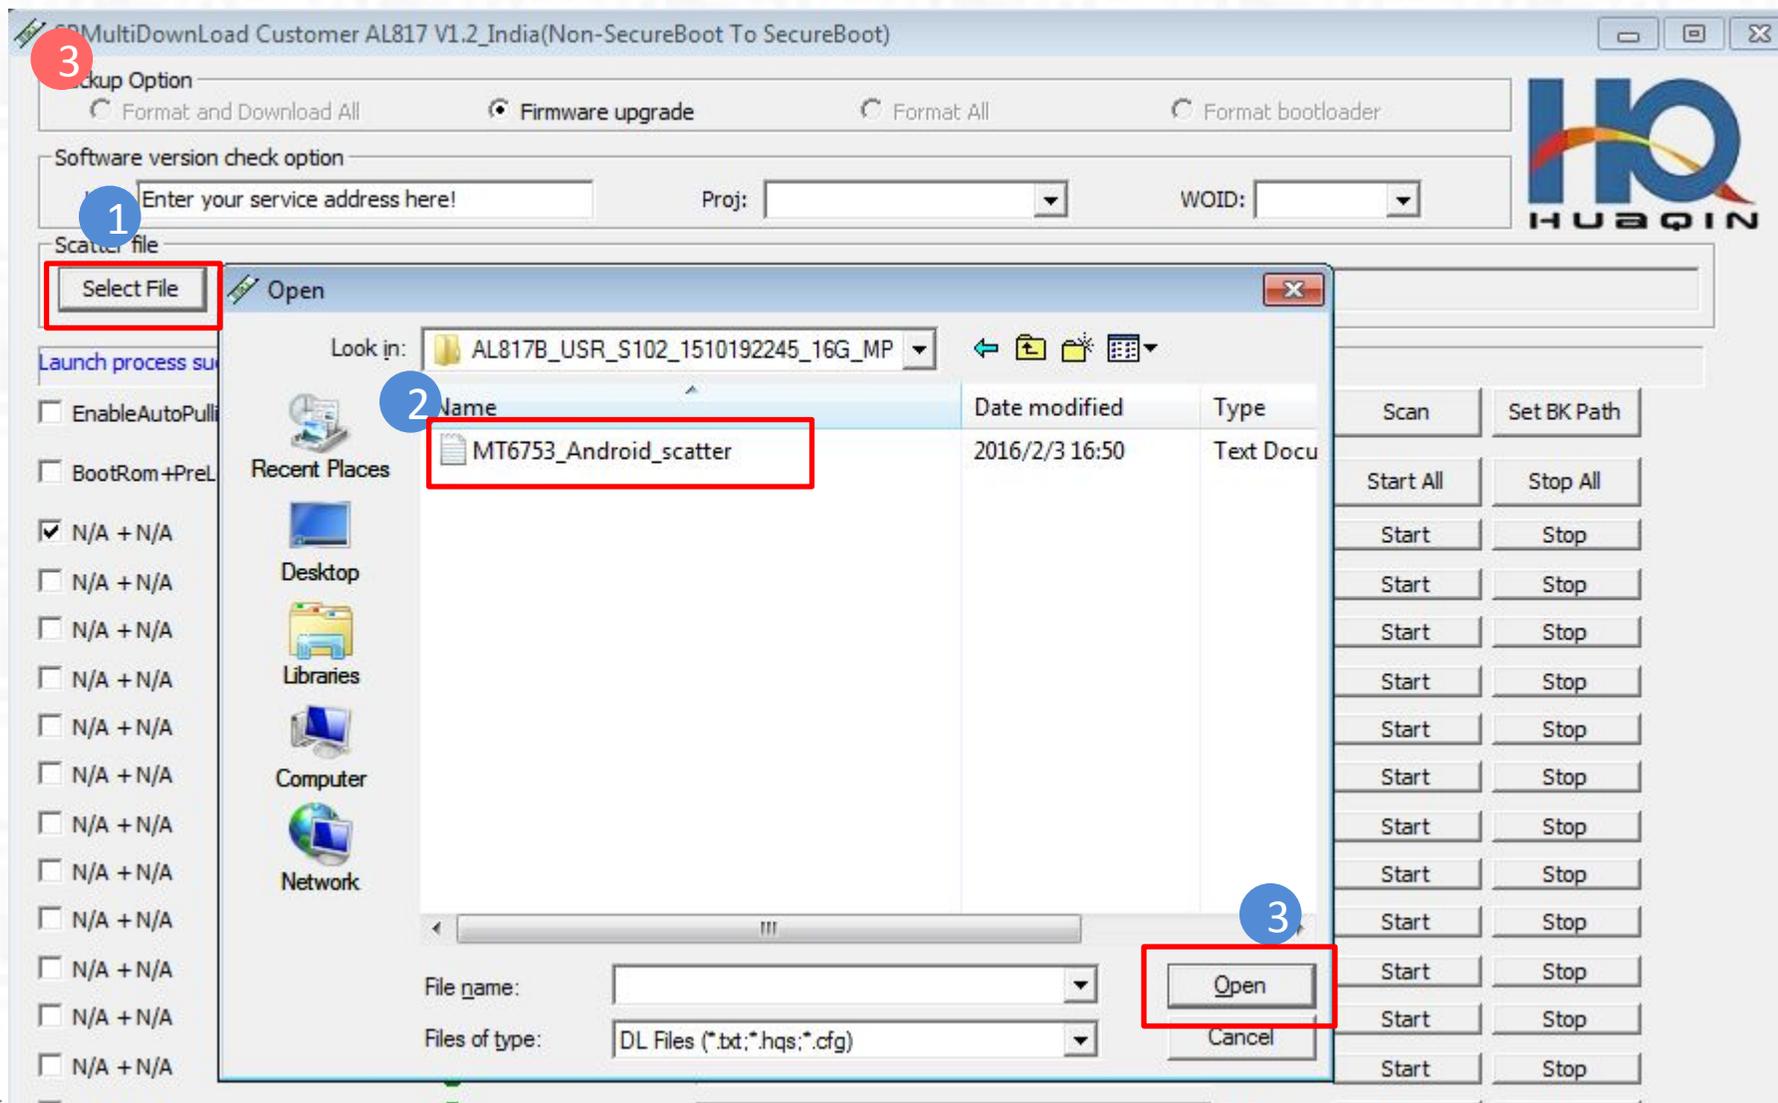


# Software Flashing SOP

4. Scan ports:
  1. Click “Scan” ;
  2. Keep holding down the device **volume -** , then connect device and computer until scanning success(about 5s).

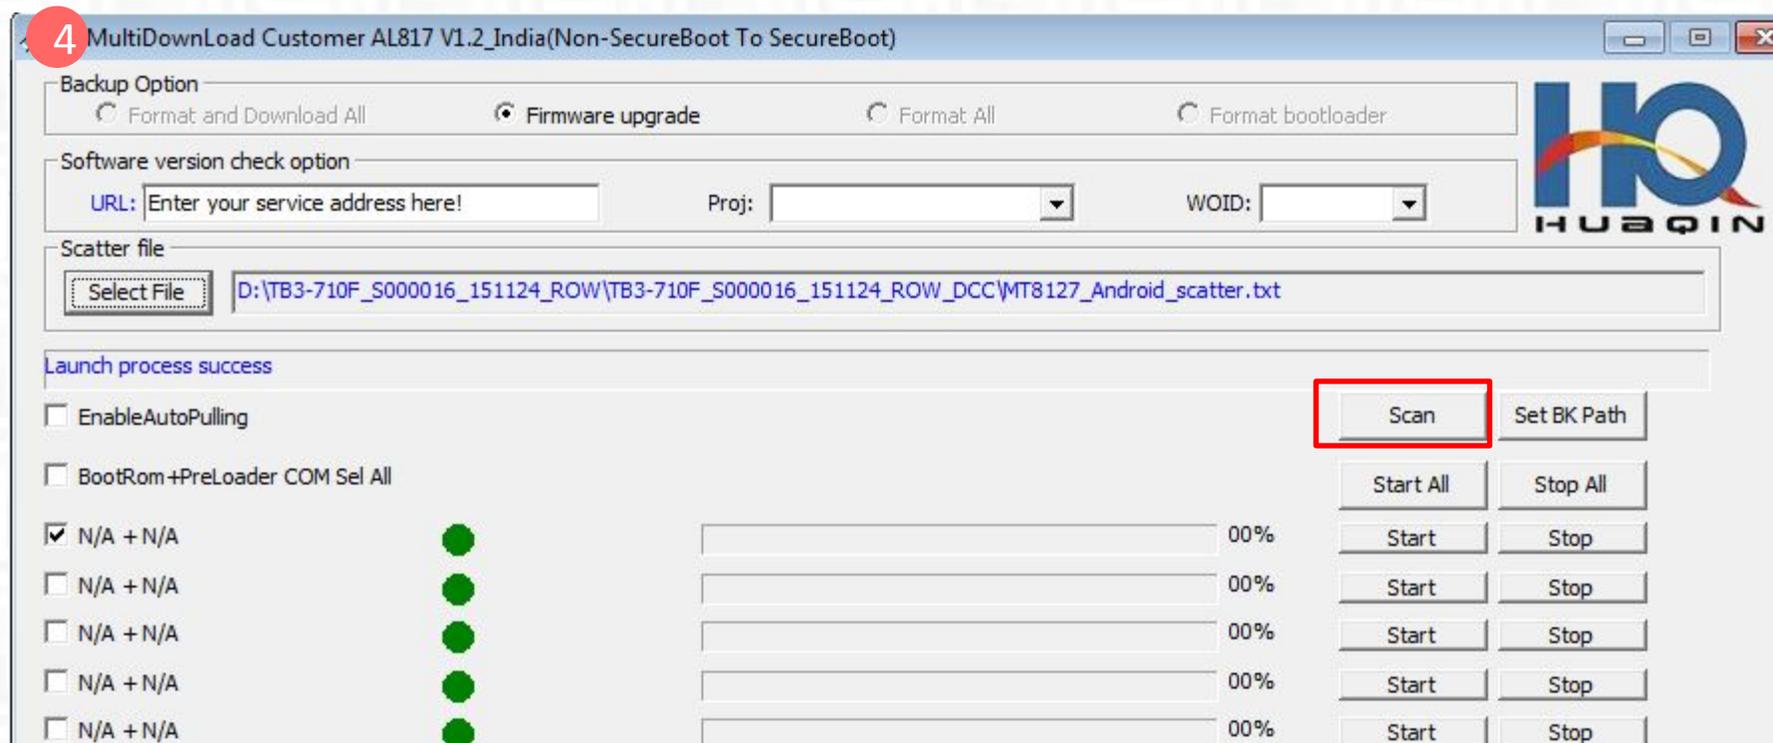


# Software Flashing SOP

5. When the port scans success, click “Stop All”.

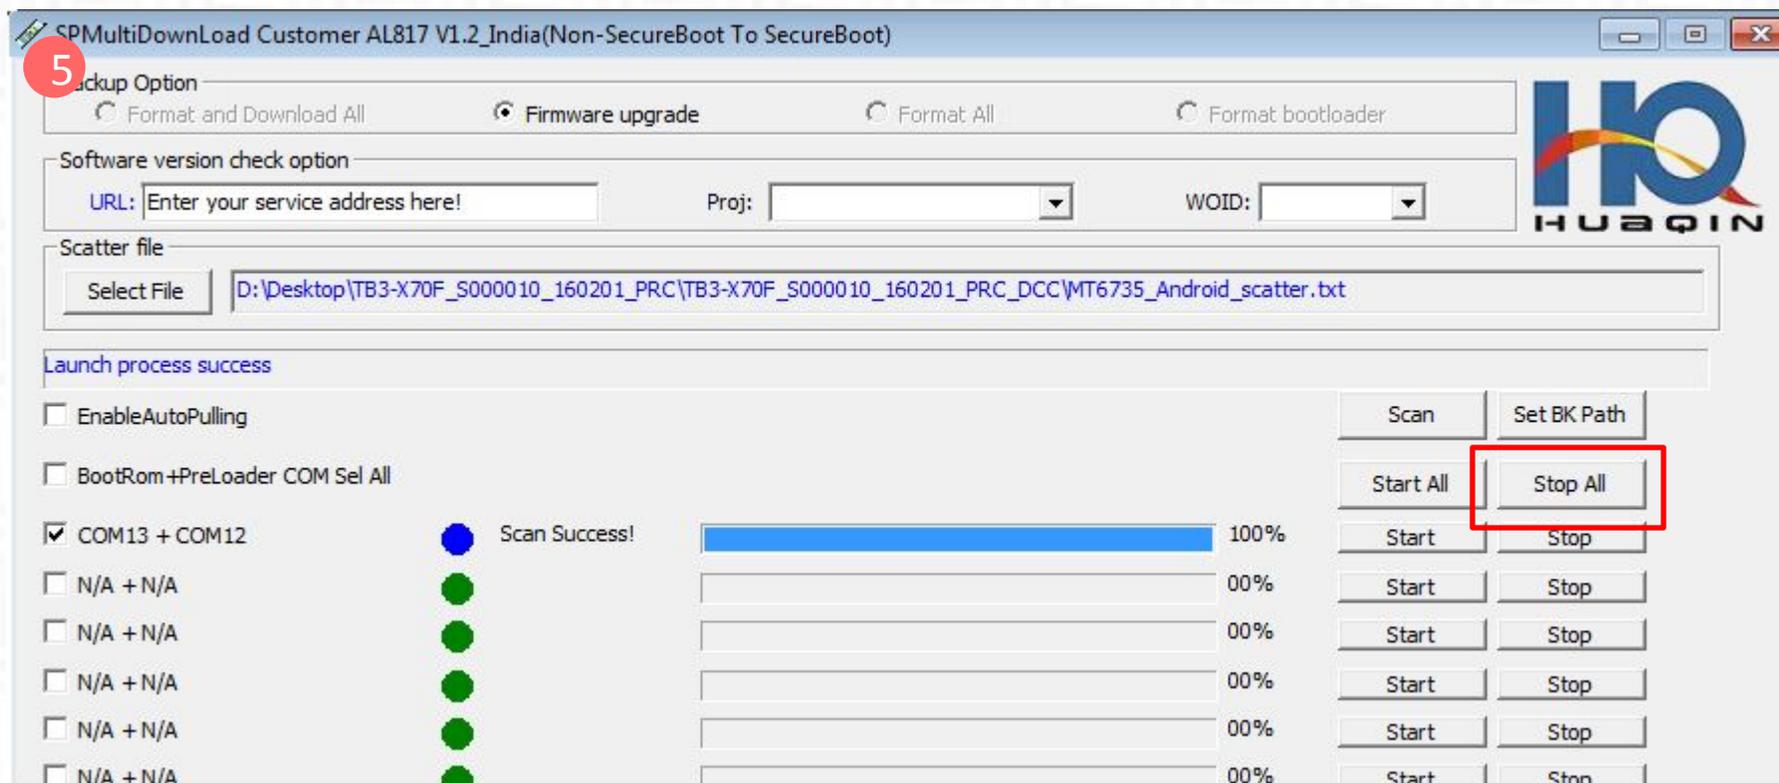

# Software Flashing SOP

6. Then click “Start”.

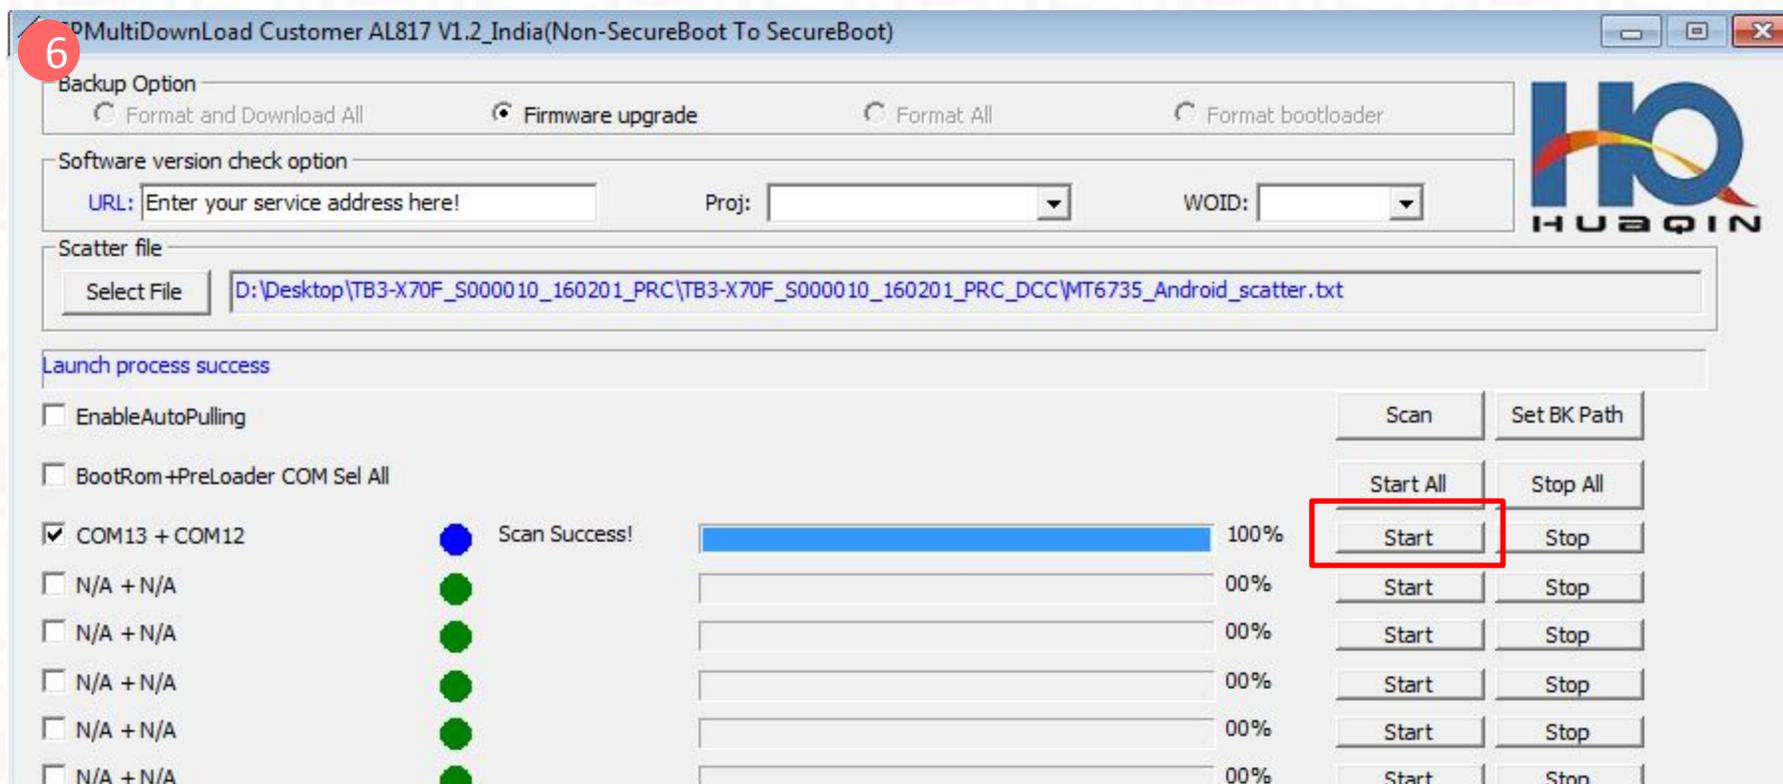



# Software Flashing SOP

10 Up Option

Format and Download All     Firmware upgrade     Format All     Format bootloader

Software version check option

URL:     Proj:     WOID:

Scatter file

Select File

Format EMMC flash: begin\_addr(0x00000000C4000000), length(0x0000000682B80000). Auto Polling number:0

EnableAutoPulling

BootRom+PreLoader COM Sel All

COM 4 + COM 3    ● DL        15%       

N/A + N/A    ●        00%       

N/A + N/A    ●        00%       

Buttons: Scan, Set BK Path, Start All, Stop All, Start, Stop

When the progress bar is completed, disconnect USB cable, restart the device.



# THANK YOU

DAKUJEM DANK BEDANKT MERCI תודה TAKK 谢谢  
ありがとう СПАСИБО GRACIAS DZIĘKUJĘ DANKE  
OBRIGADO БЛАГОДАРЯ GRAZIE धन्यवाद GRACIAS

