



1. Check if the driver of Intel Imaging Signal Processor 2400 (Intel® AVStream Camera) is 20.10130.5737.684  
If yes , go to STEP 5.  
If not go to STEP 2.

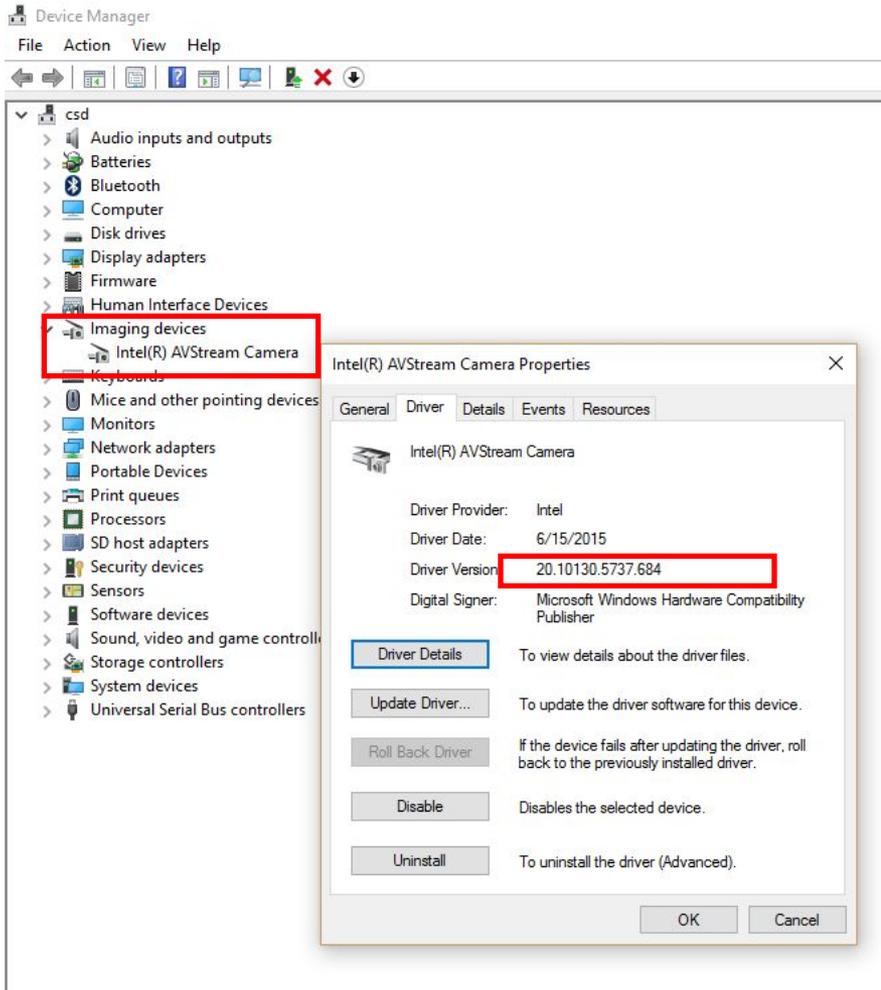


2. Click "Update Driver Software".

3. Click "Search automatically for updated driver software".

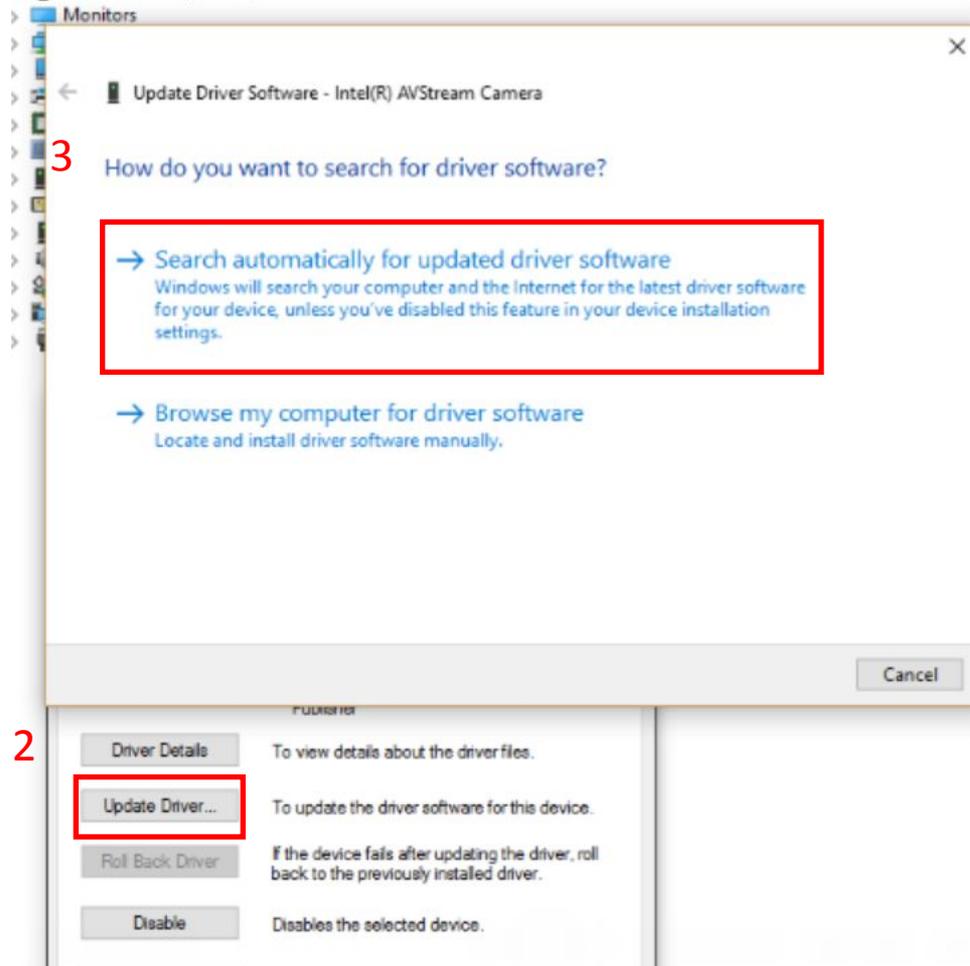


#### 4. Click "Close"

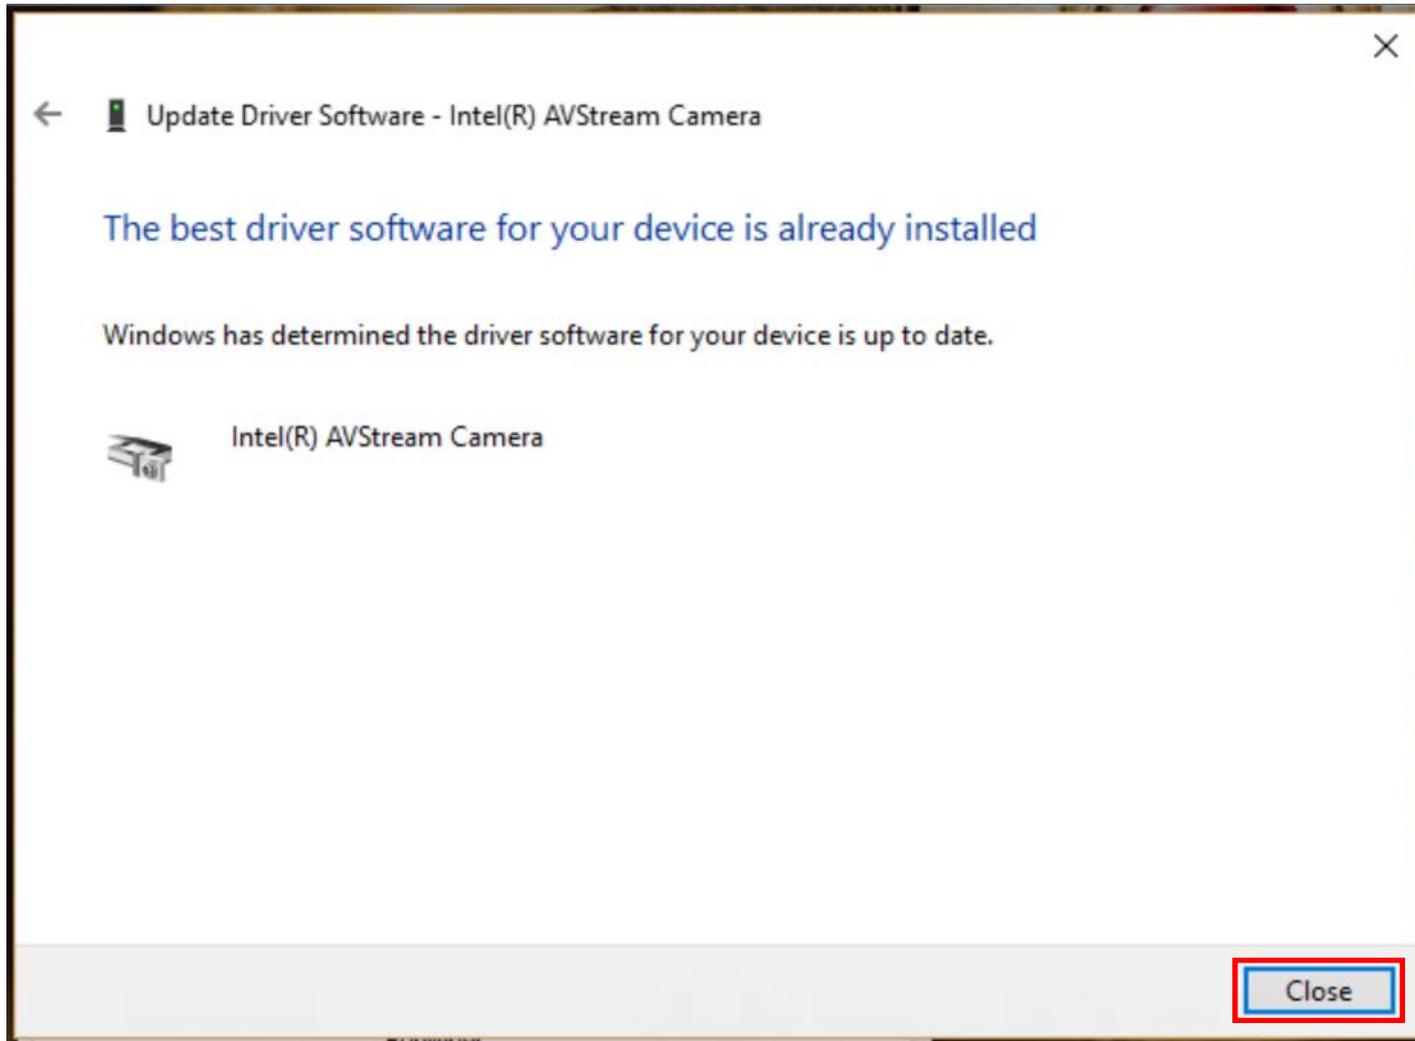

5. Find "Camera sensor OV2722" on the system device in device manager.


6. Click right key of touch pad.

7. Click "Uninstall".

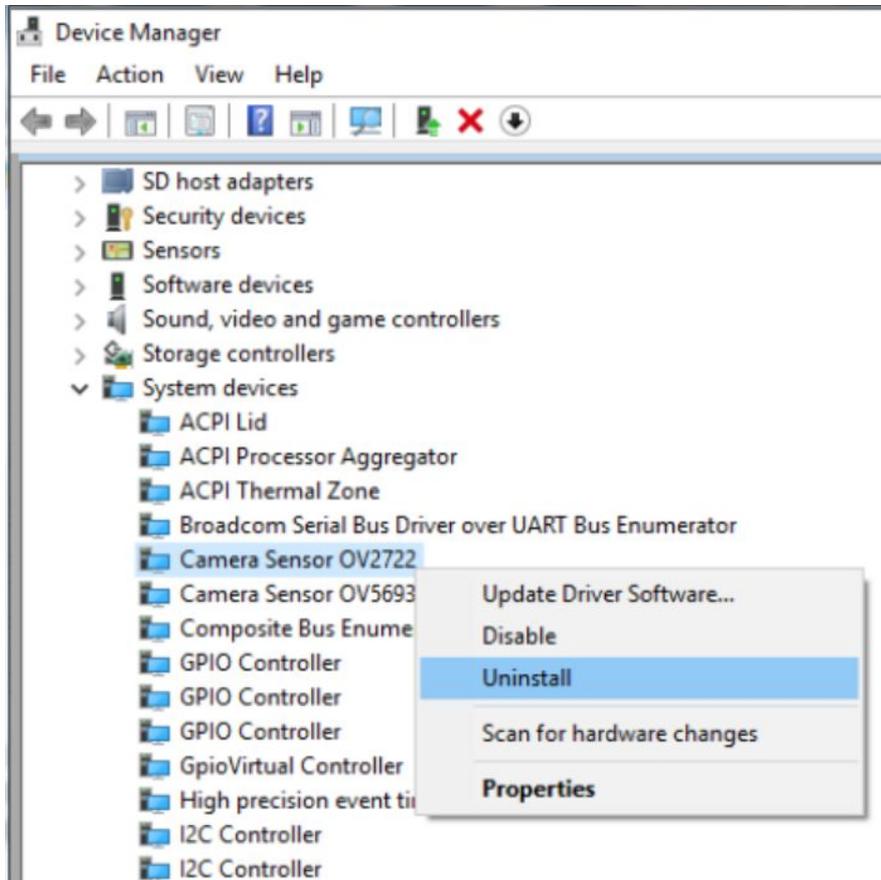

8. Check the "Delete the driver software for this device".


9. Click "OK" to uninstall the camera driver.

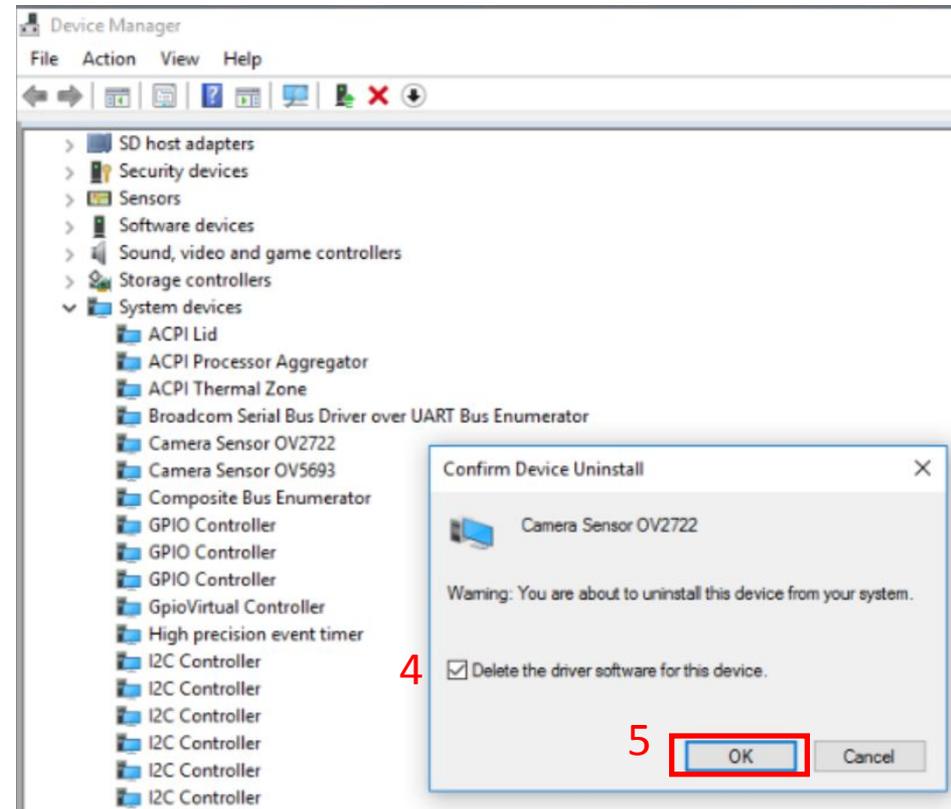

10. Find "Camera sensor OV5693" on the system device in device manager.


11. Click right key of touch pad.

12. Click "Uninstall".

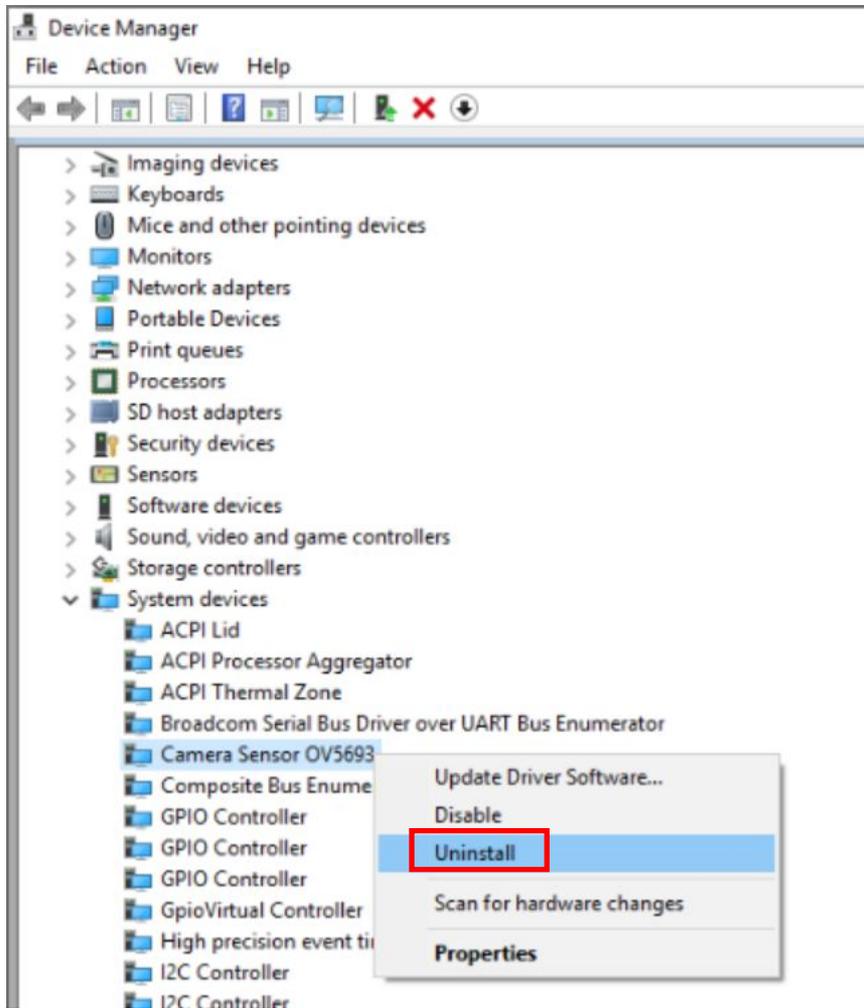


13. Check the "Delete the driver software for this device".

14. Click "OK" to uninstall the camera driver.

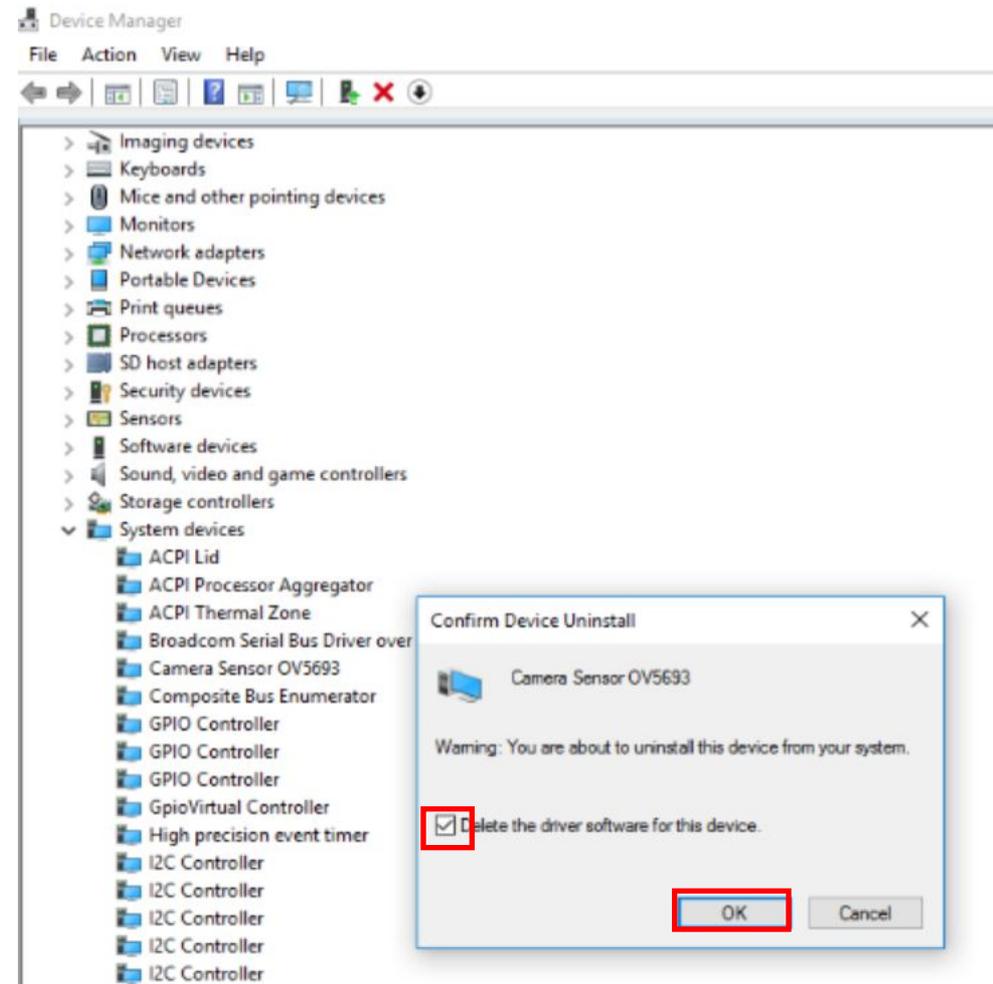


15. Click "Scan for hardware changes"

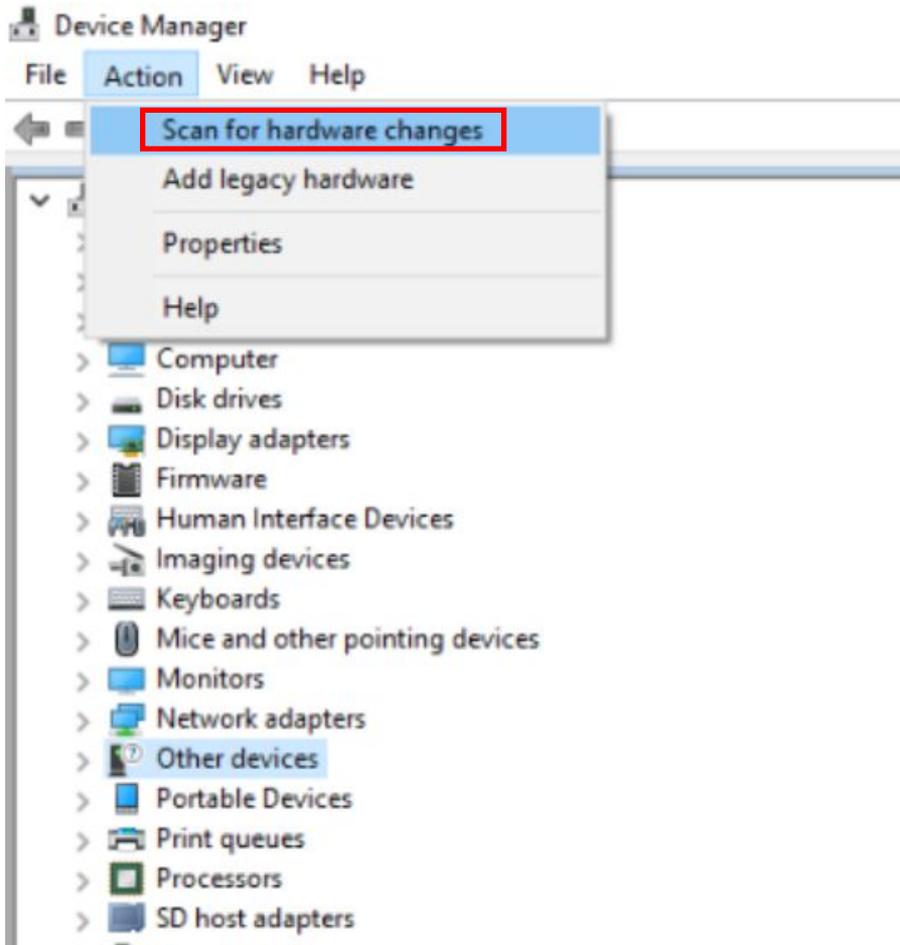


16. Find "Unknown device" in Other devices.

17. Click right key of touch pad.

18. Select "Update Driver Software.."

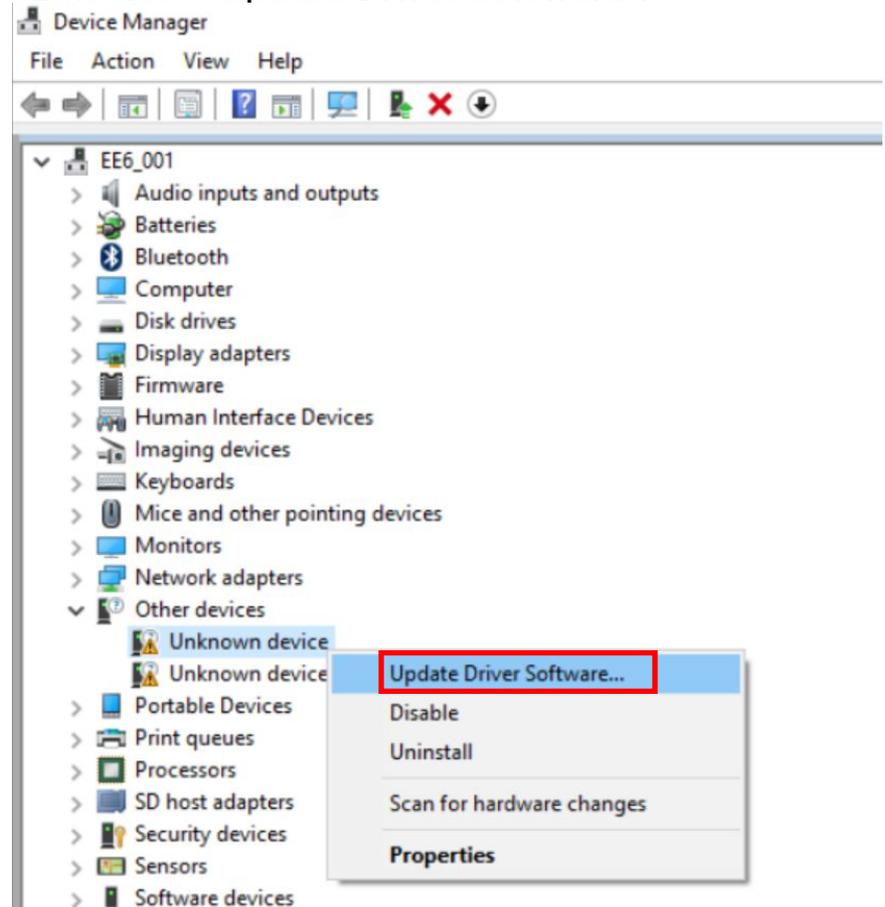


## 19. Select “Browse my computer for driver software”.

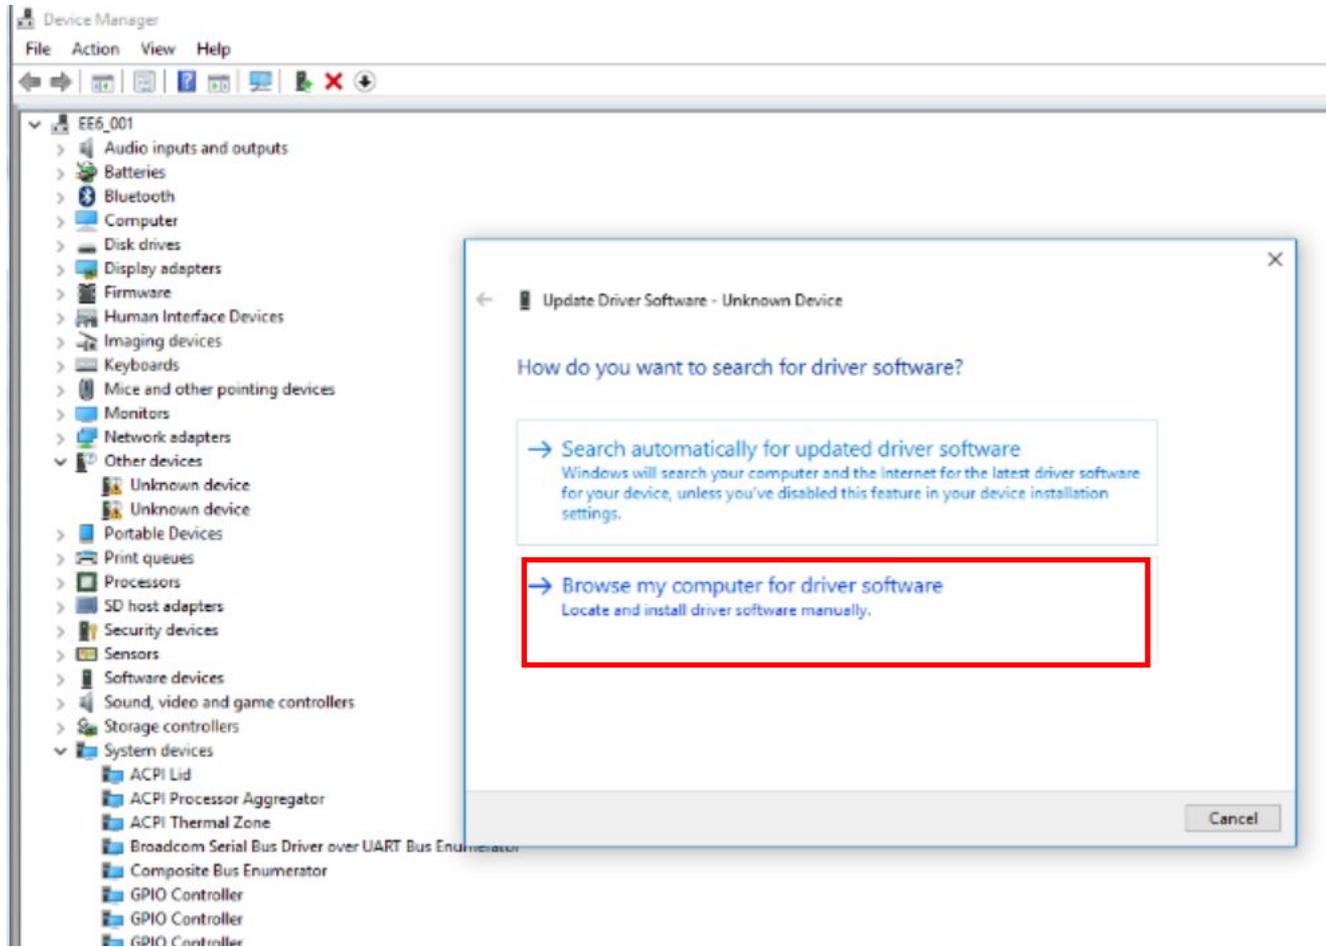


20. Click "Browse"

21. Find the driver folder and click OK.

22. Click Next to start installing the driver.

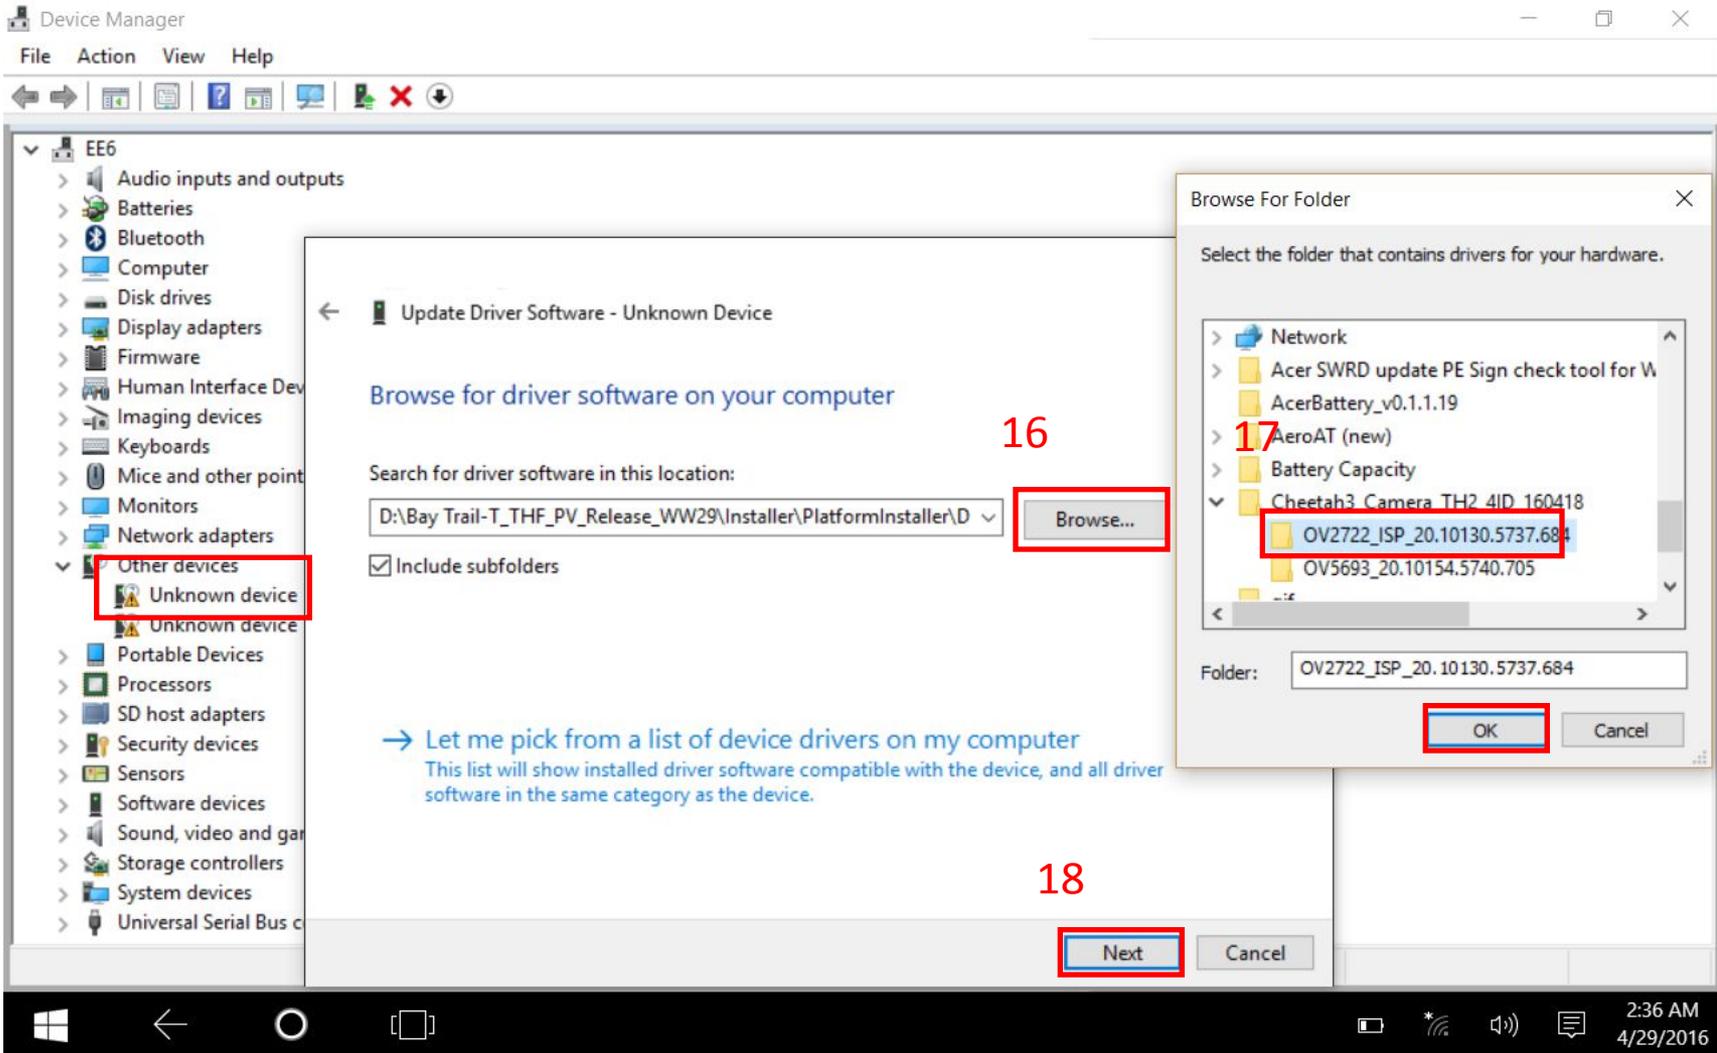

23.Finished the OV2722 driver installation then click “Close”.

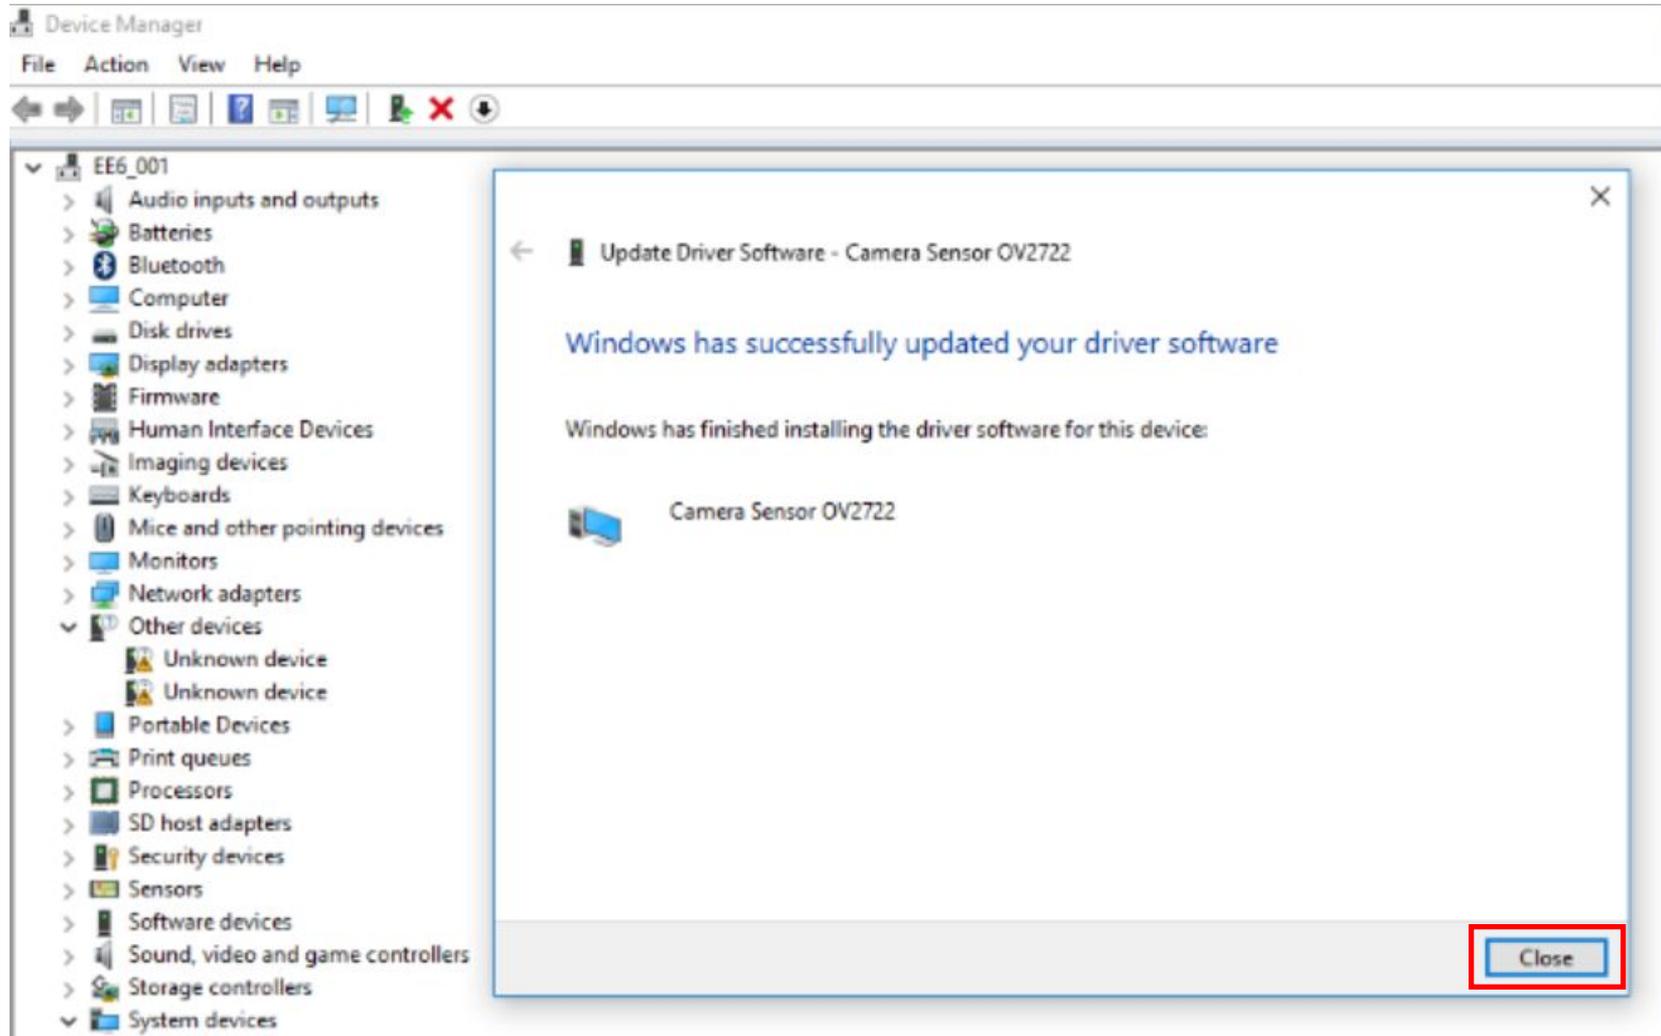

## 24. Check the driver version of OV2722.

The screenshot displays the Windows Device Manager window. On the left, the 'System devices' tree is expanded to show 'Camera Sensor OV2722'. A context menu is open over this device, and the 'Properties' option is selected, opening the 'Camera Sensor OV2722 Properties' dialog box. The 'Driver' tab is active, showing the following information:

- Driver Provider: Intel Corporation
- Driver Date: 6/15/2015
- Driver Version: 20.10130.5737.684 (highlighted with a red box)
- Digital Signer: Microsoft Windows Hardware Compatibility Publisher

Below the information, there are several buttons and their descriptions:


- Driver Details**: To view details about the driver files.
- Update Driver...**: To update the driver software for this device.
- Roll Back Driver**: If the device fails after updating the driver, roll back to the previously installed driver.
- Disable**: Disables the selected device.
- Uninstall**: To uninstall the driver (Advanced).

The 'OK' and 'Cancel' buttons are at the bottom right of the dialog box. The Windows taskbar at the bottom shows the time as 2:39 AM on 4/29/2016.


25. Find "Unknown device" in Other devices.

26. Click right key of touch pad.

27. Select "Update Driver Software.."

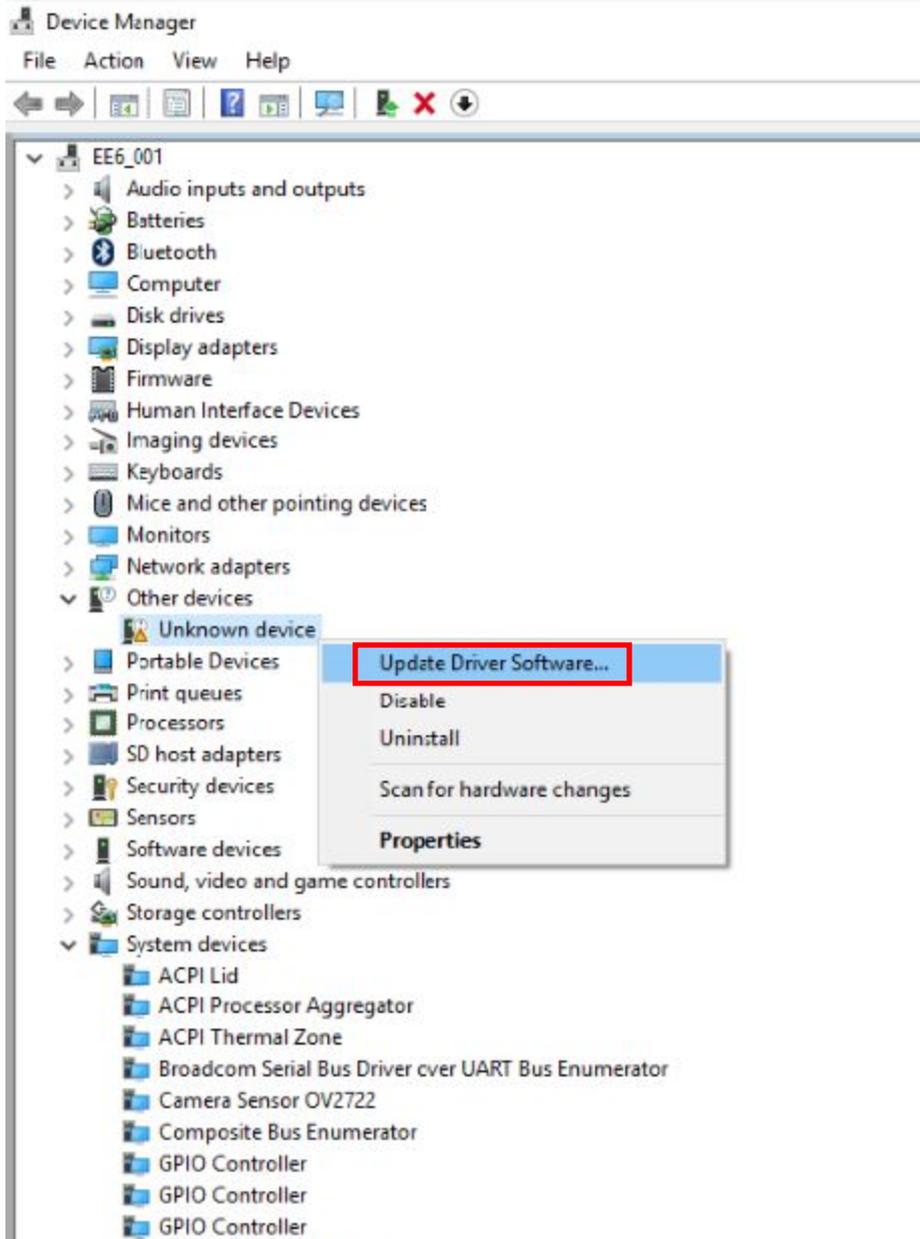


28. Select “Browse my computer for driver software”.

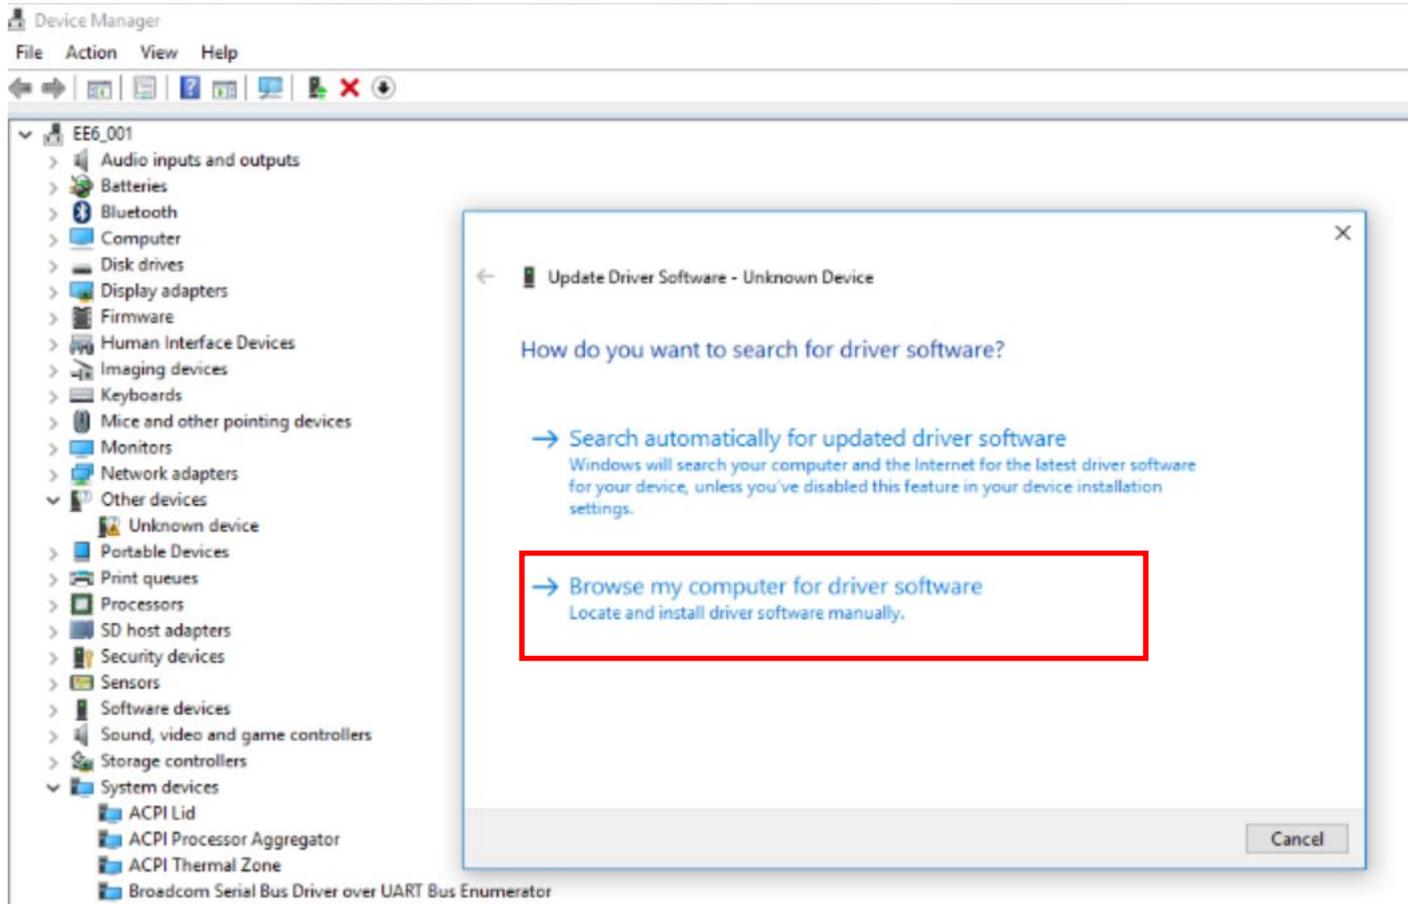


29. Click "Browse"

30. Find the driver folder and click OK.


31. Click Next to start installing the driver.

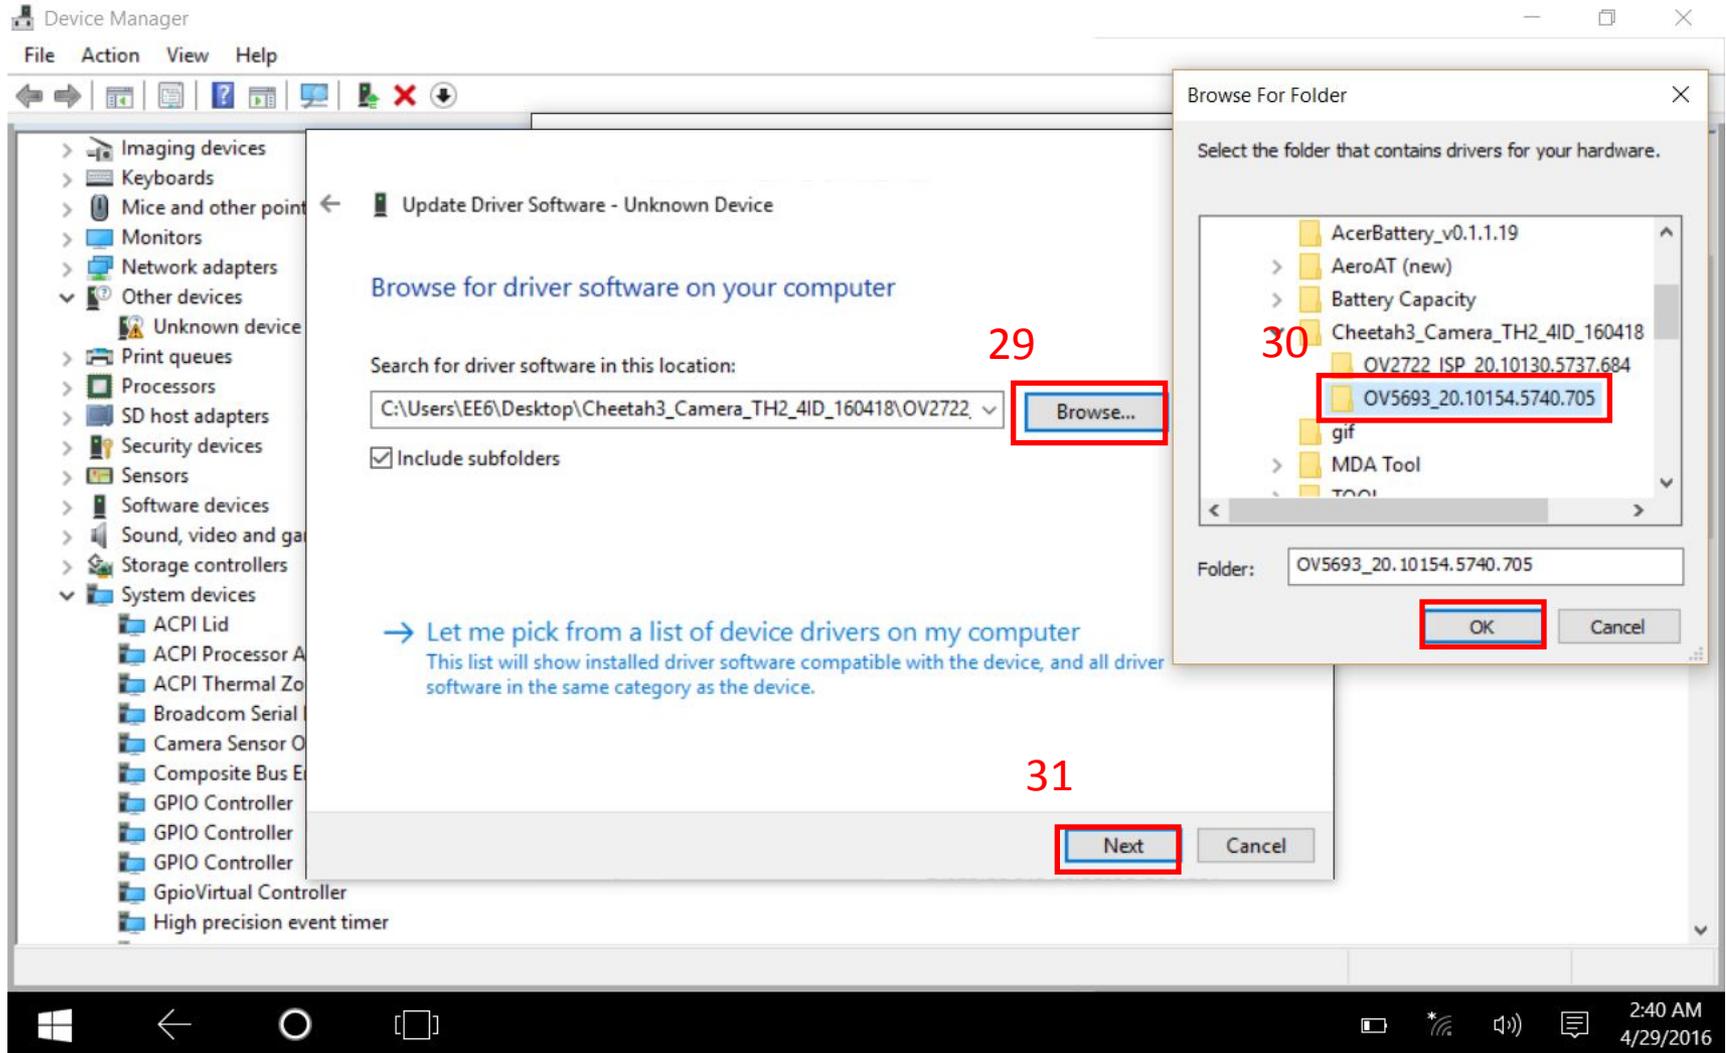

32.Finished the OV5693 driver installation then click "Close".

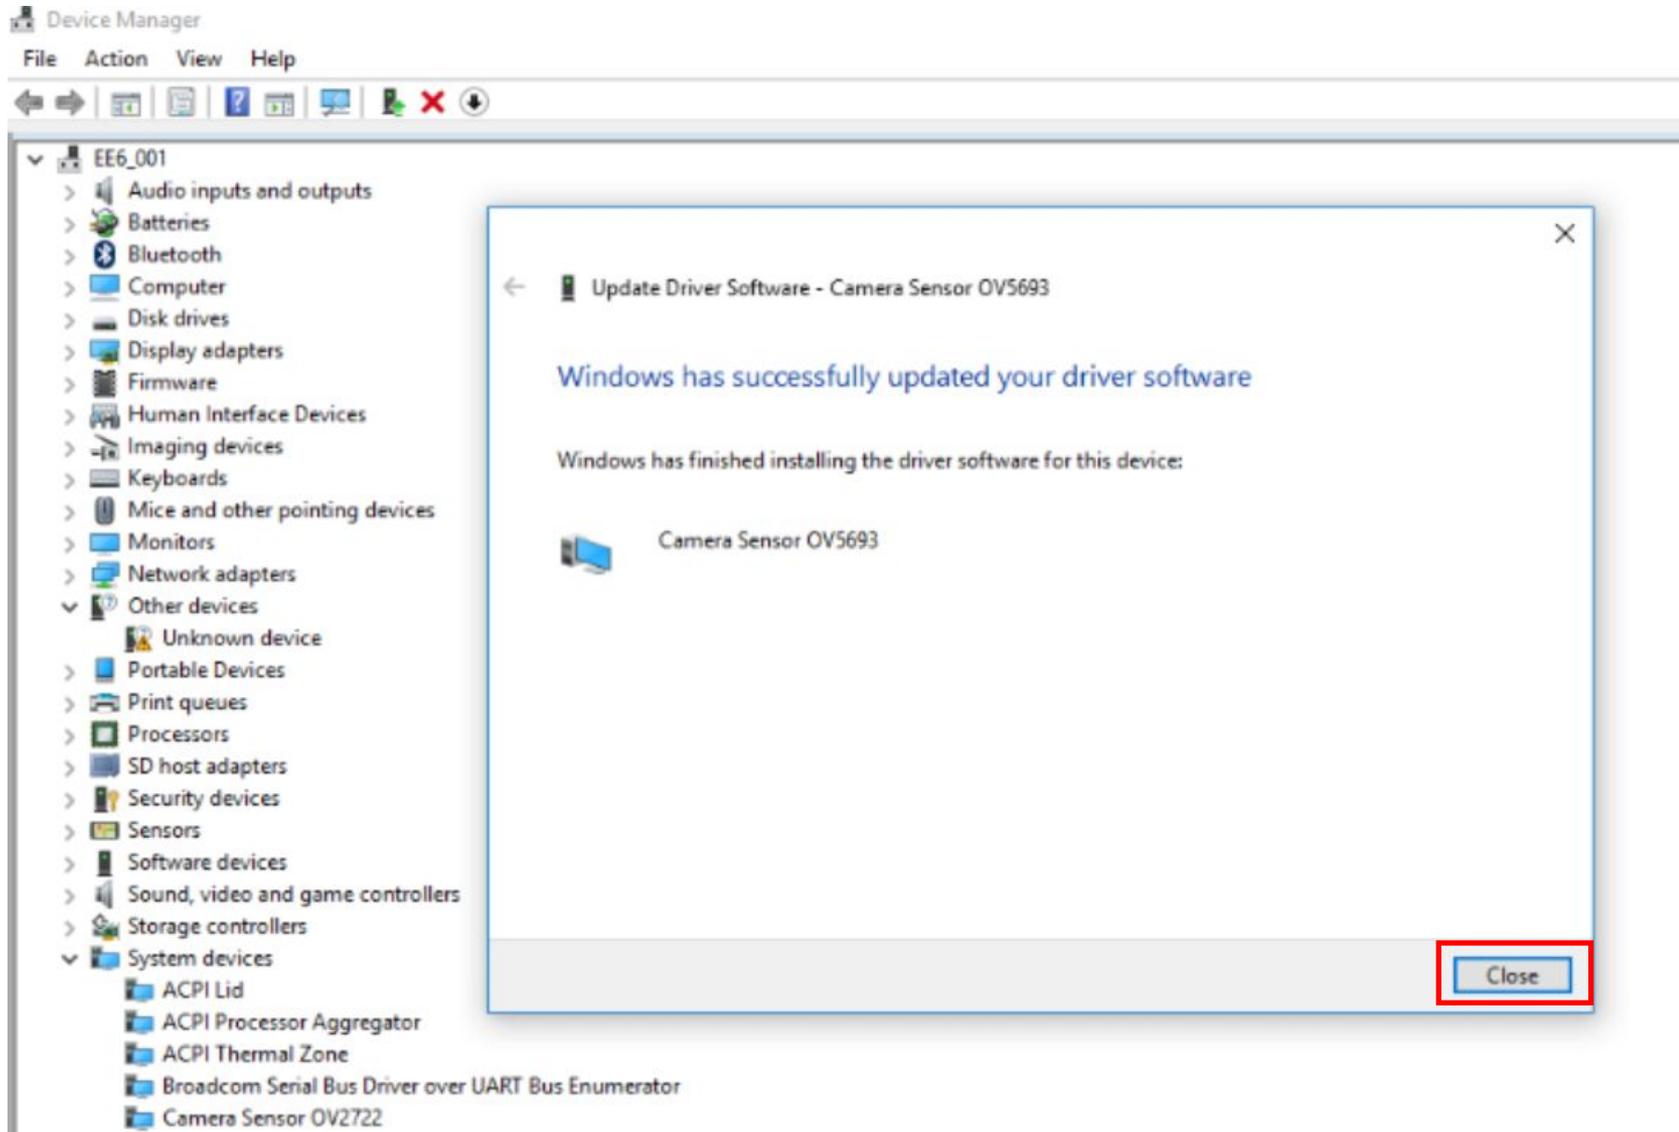

### 33. Check the driver version.

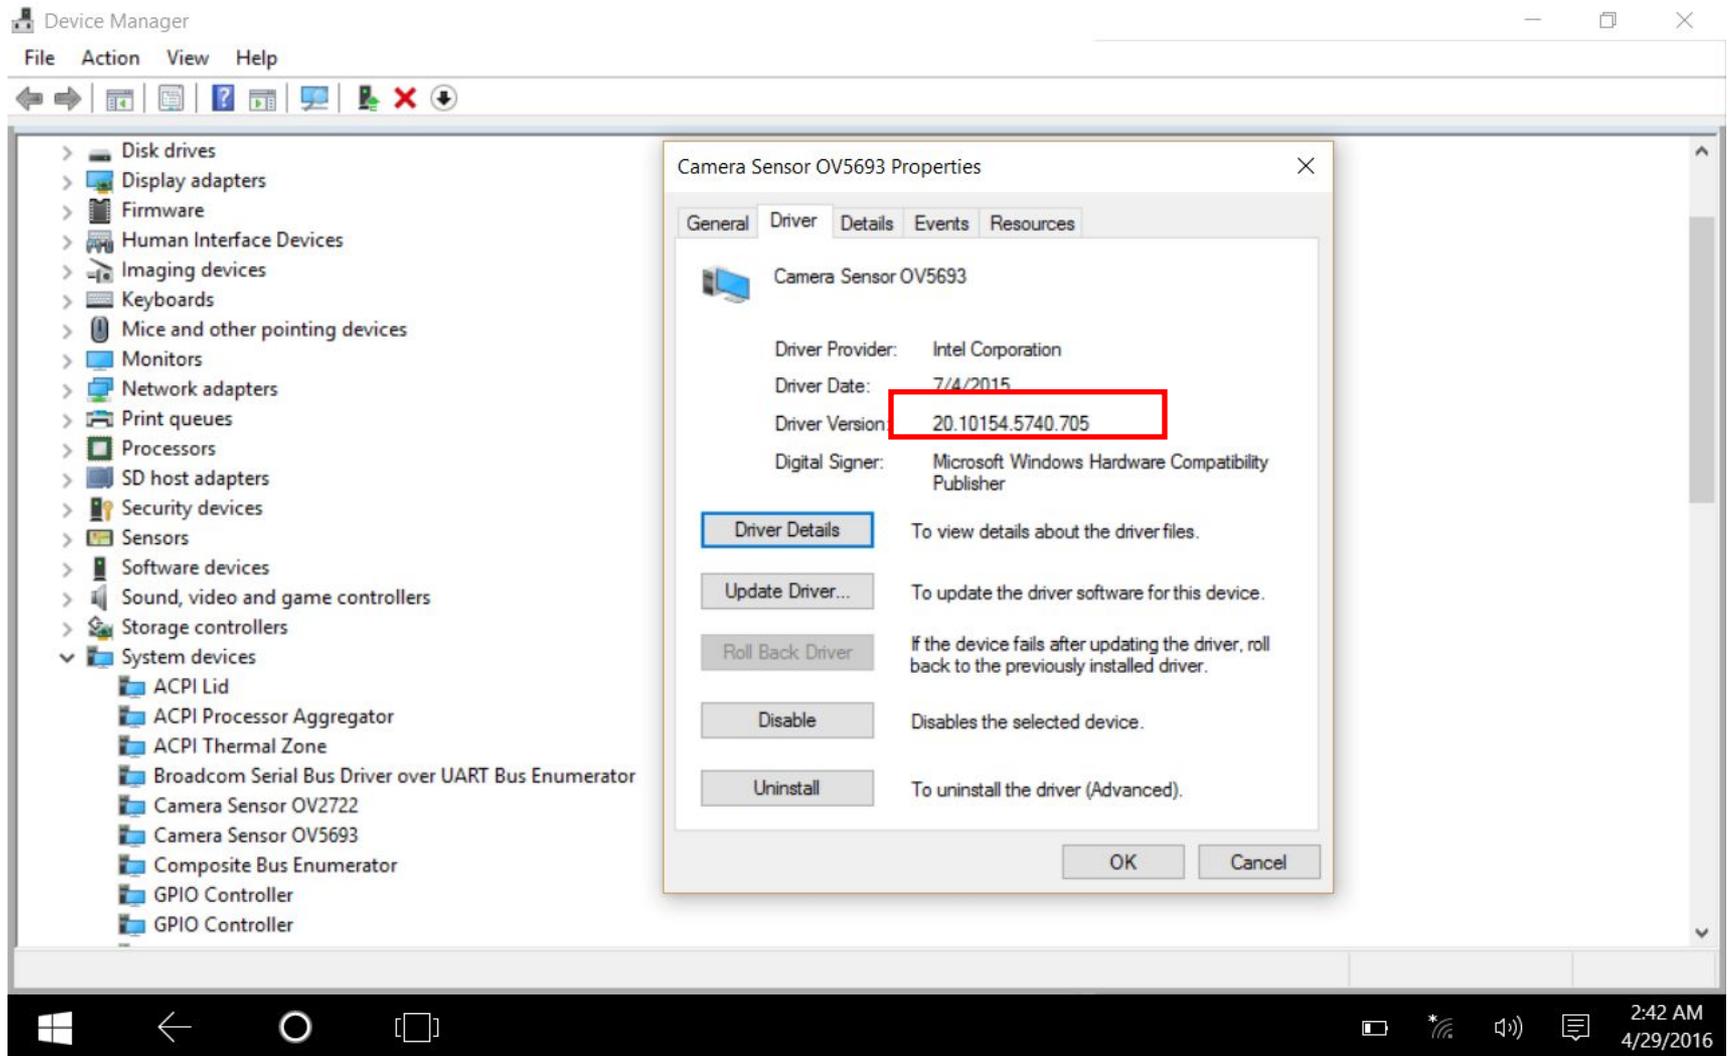

### 34. Restart the machine.