


How to install the Windows 7 on DOS version E10-30

I. Configure in the BIOS setup

Configure in the BIOS setup


Step1: Power on your computer and press Fn+F2 enter BIOS setup, Locate “Configuration” page, change “USB XHCI Controller” from “Enabled” to “Disabled” as picture 1-1.

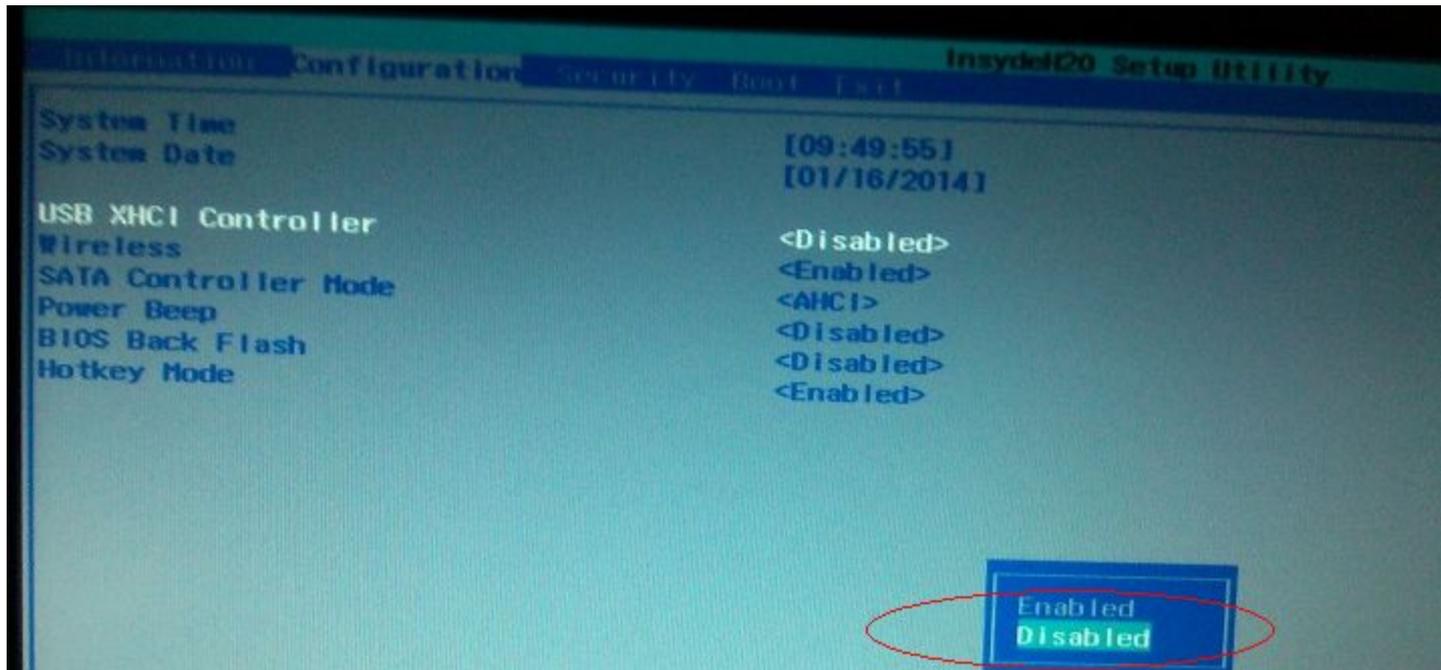

Picture 1-1 Select “Disabled”

Configure in the BIOS setup (Continue)

Step2: Press Fn+F10 saving changes and exit as picture 1-2.

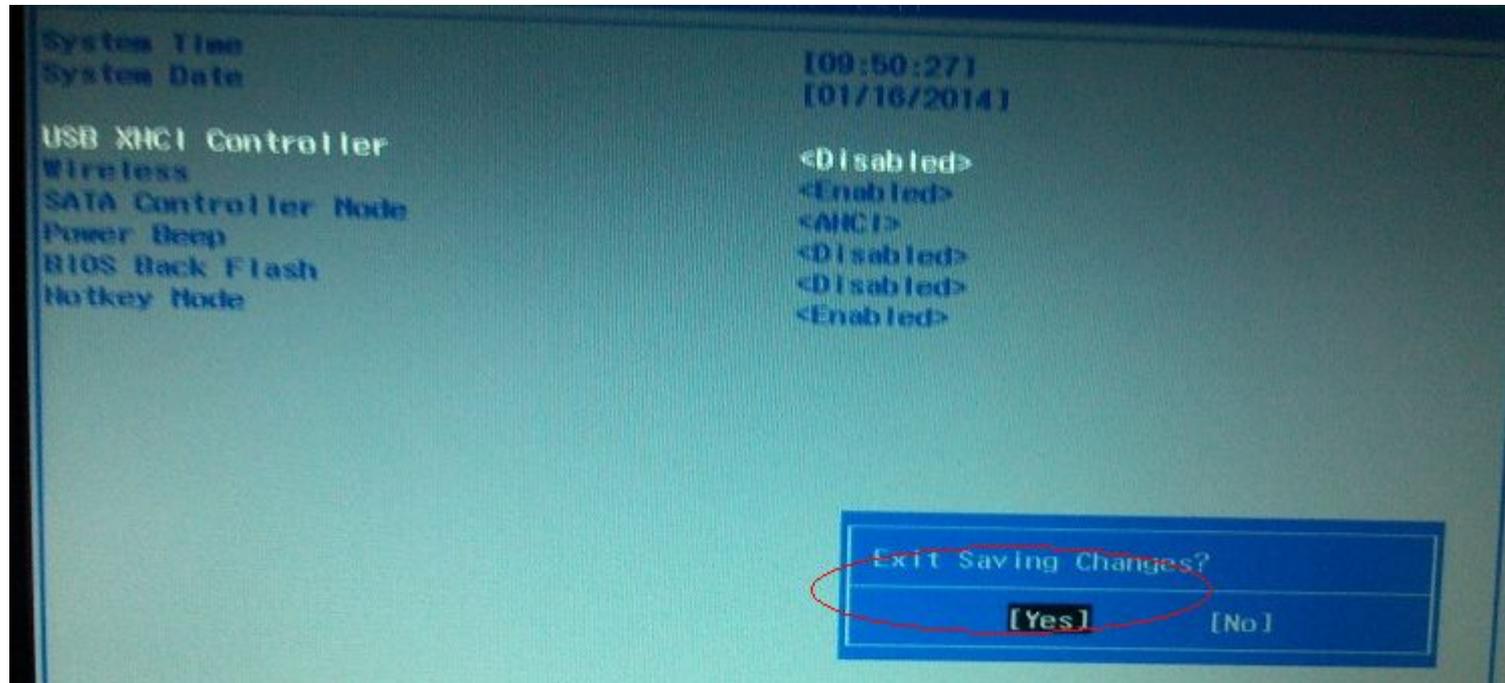


Picture 1-2 Save and exit

II. Install Windows 7

Install Windows 7

Plug USB CD/DVD-ROM with Windows 7 disk, power on your computer and press Fn+F12, select boot from USB CD/DVD-ROM as picture 1-3, and then start to Windows install.

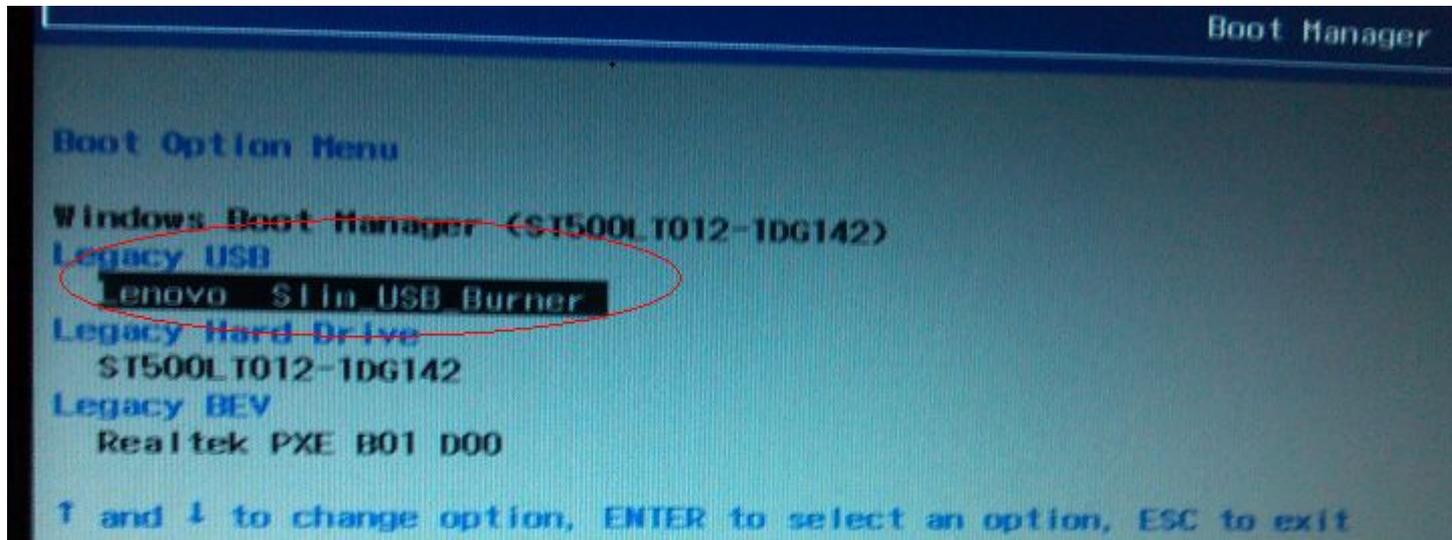

Picture 1-3 Boot from USB CD/DVD-ROM


Get XHCI Driver

Copy XHCI driver from USB driver disk to HDD or download XHCI driver from LENOVO official website to HDD

III. Configure in the BIOS setup

Configure in the BIOS setup


Step1: Power on your computer and press Fn+F2 enter BIOS setup, Locate “Configuration” page, change “USB XHCI Controller” from “Disabled” to “enabled” as picture 1-4.

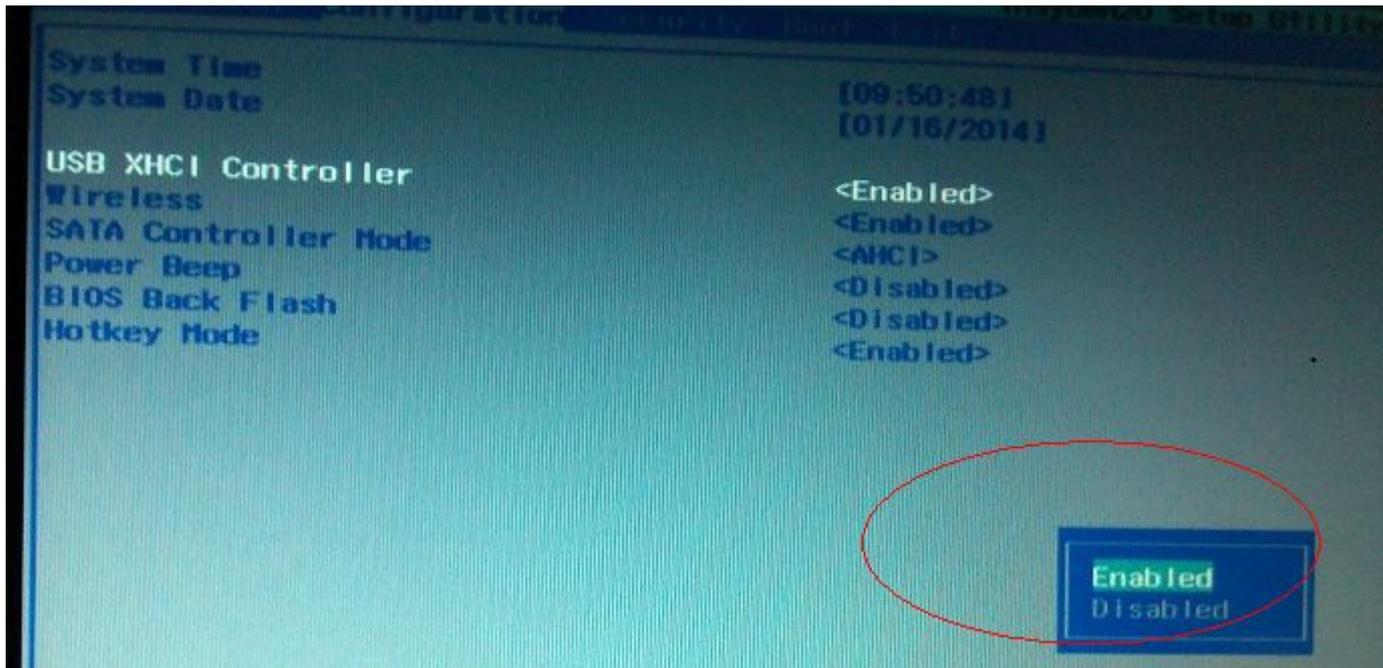

Picture 1-4 Select “Enabled”

Configure in the BIOS setup (Continue)

Step2: Press Fn+F10 saving changes and exit as picture 1-5.

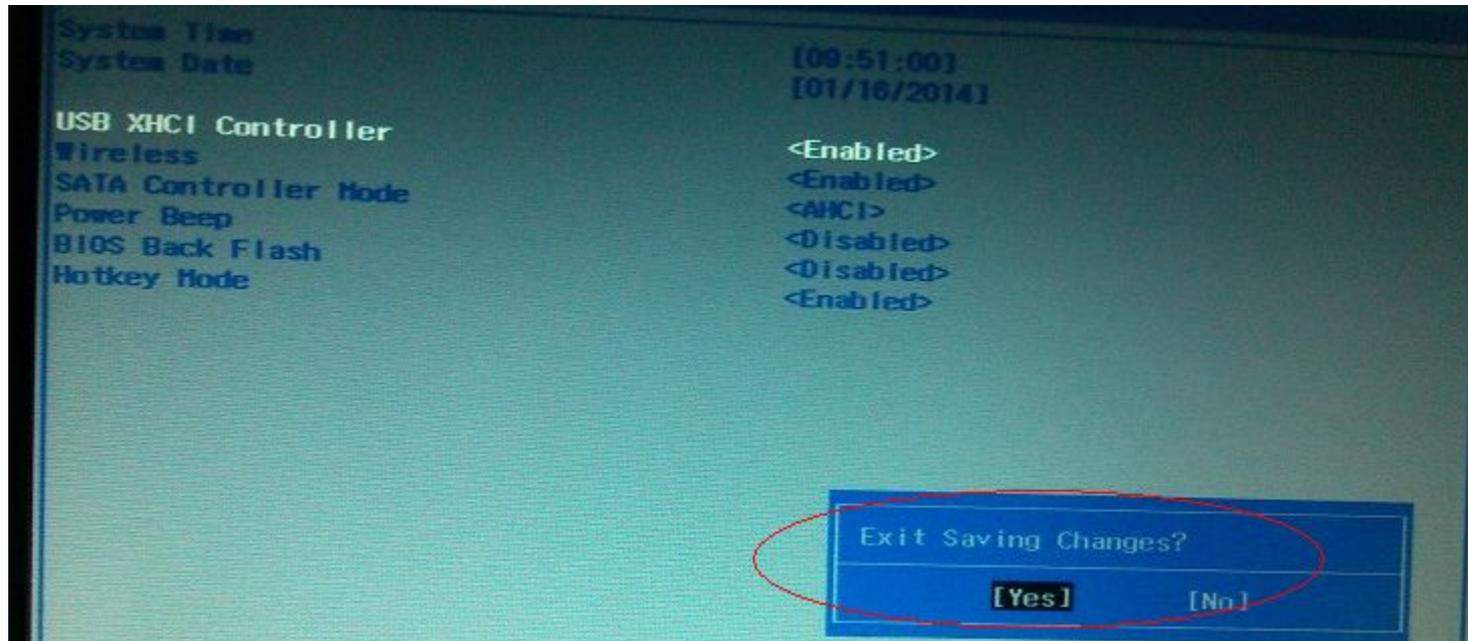

Picture 1-5 Save and exit

Install XHCI Driver

Step1: Power on and boot to win7 , there will appear an unknown device.

Step2: Using TP to double click XHCI driver setup file to install XHCI driver ,wait install complete

Step3: Reboot win7 and all USB ports can works.

Thank you!