


Архитектура **ORACLE**

Области оперативной памяти

Лекция 5

Схема экземпляра

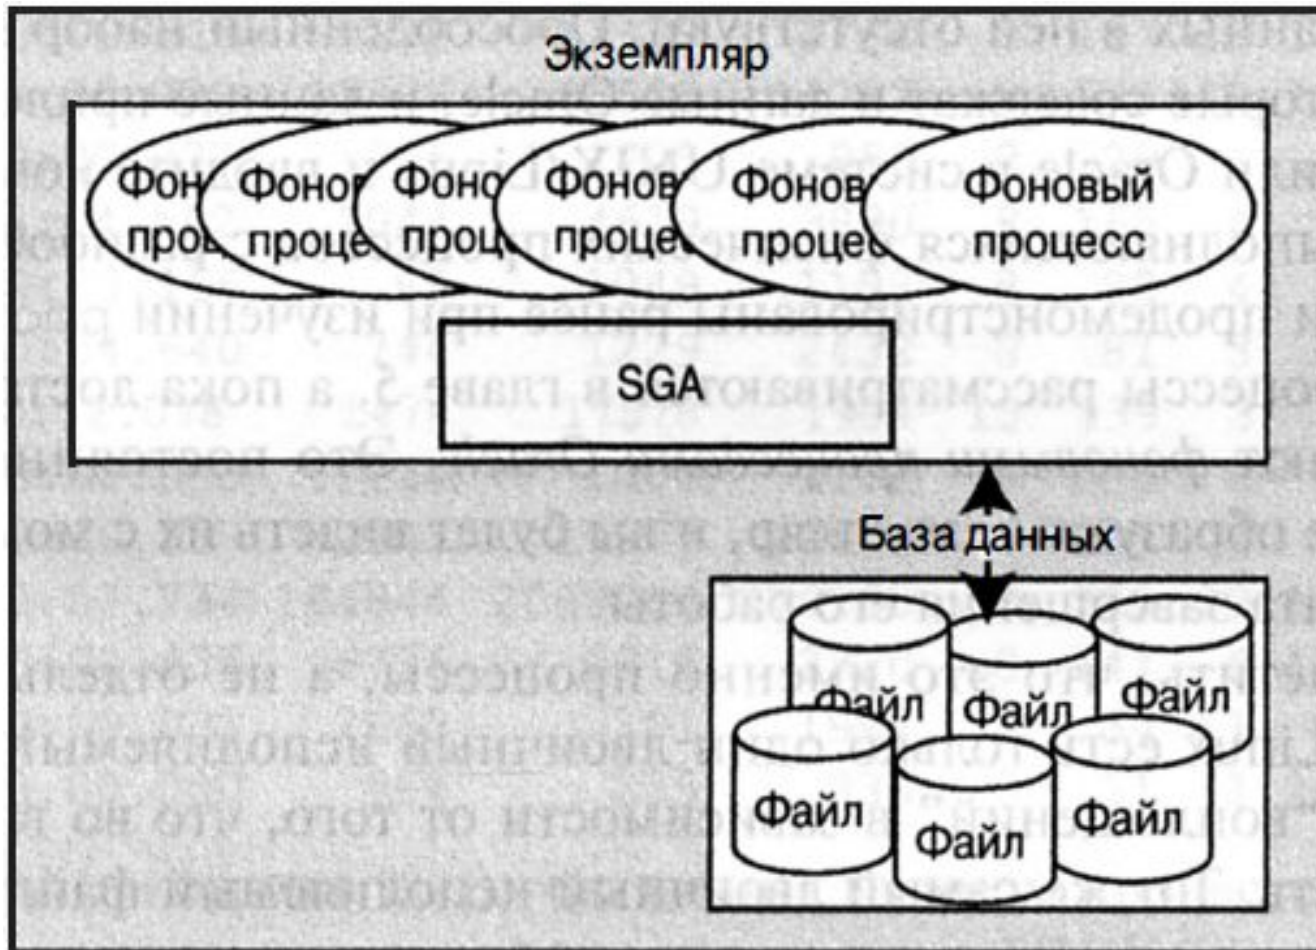

Основные структуры памяти

- SGA – System Global Area – глобальная область системы
- PGA – Process (Program) Global Area – глобальная область процесса
- UGA – User Global Area – глобальная область пользователя



PGA

- PGA - это область памяти, в которой хранятся данные и управляющая информация о серверных процессах Oracle:
- Пространство стека - это память, хранящая переменные сеансов, массивы сеансов и т.д.
- Информация сеанса
- Приватная SQL-область – связанные переменные и буферы реального времени.




UGA – User Global Area

- Располагается в области SGA, если подключение выполнено посредством разделяемого сервера
- Располагается в области PGA, если подключение выполнено через выделенный сервер




Режим выделенного сервера

- **Dedicated server** (режим по умолчанию) – для каждого клиента выделяется отдельный выделенный серверный процесс (обработчик запросов, dedicated server process) который называется shadow process (теневого процесс).

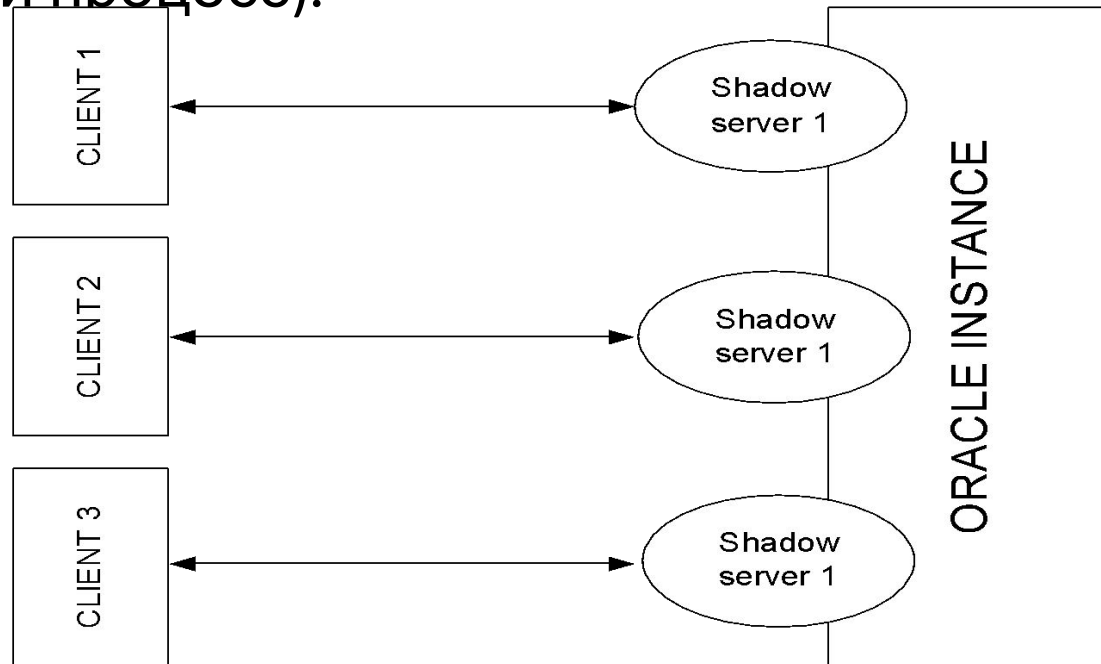

Режим разделяемого сервера

- ❑ **Shared server** – обрабатывает программа **dispatcher**:
- ❑ 1)получает запрос от клиента,
- ❑ 2)помещает их во входную очередь к разделяемым серверам;
- ❑ 3)незанятый разделяемый сервер извлекает и обрабатывает запрос;
- ❑ 4)после обработки разделяемый сервер помещает результат обработки в выходную очередь;
- ❑ 5) из очереди результат извлекает диспетчер;
- ❑ 6) диспетчер пересылает результат клиенту

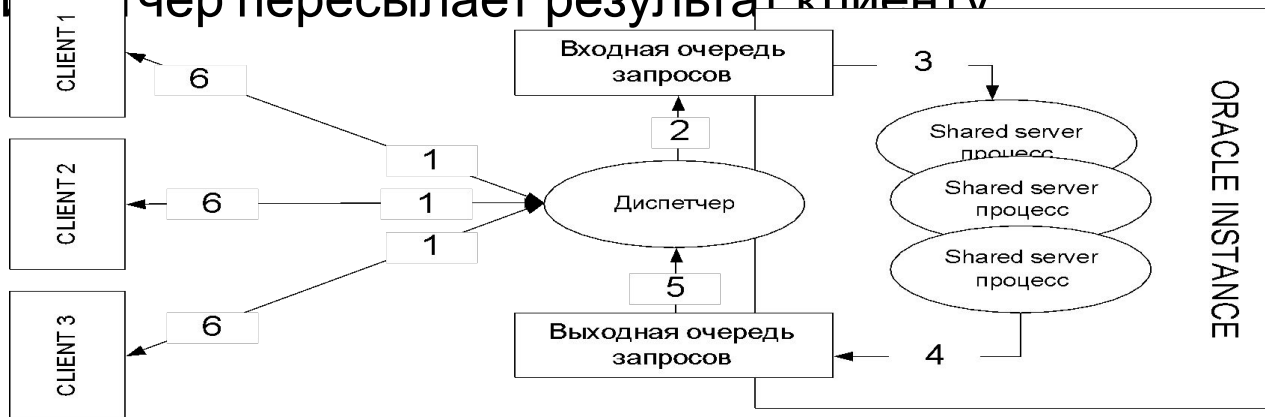

Режимы соединений

```
select username, service_name, server from v$session where username is not null;
```

Query Result x

SQL | All Rows Fetched: 6 in 0 seconds

	USERNAME	SERVICE_NAME	SERVER
1	SYS	pdb_a.be.by	DEDICATED
2	SYS	SYS\$USERS	DEDICATED
3	SYSTEM	pdb_a.be.by	DEDICATED
4	SYS	pdb_a.be.by	DEDICATED
5	C##USER_1	SYS\$USERS	DEDICATED
6	C##USER_1	pdb_a.be.by	DEDICATED

Структура SGA



Основные пулы области SGA

- Java pool
- Large pool
- Shared pool
- Streams pool
- “Null” pool



Структура оперативной памяти Oracle 12c

```
SQL> startup open;
ORACLE instance started.

Total System Global Area 1670221824 bytes
Fixed Size                 2403352 bytes
Variable Size             1006633960 bytes
Database Buffers          654311424 bytes
Redo Buffers               6873088 bytes
Database mounted.
Database opened.
```

SELECT * FROM V\$SGA;

Query Result x

SQL | All Rows Fetched: 4 in 0 seconds

NAME	VALUE	CON_ID
1 Fixed Size	2403352	0
2 Variable Size	1056965608	0
3 Database Buffers	603979776	0
4 Redo Buffers	6873088	0

SELECT SUM(VALUE) FROM V\$SGA;

Query Result x

SQL | All Rows Fetched: 1 in 0 seconds

SUM(VALUE)
1 1670221824

Представления словаря

- v\$sga
- V\$sgastat
- v\$sga_dynamic_components
- v\$sga_dynamic_free_memory



Гранулы – granule

- Память различным пулам в SGA выделяется блоками, которые называются гранулами.
- Одна гранула (granule) - это область памяти размером 4, 8 или 16 Мбайт.
- Гранула является наименьшей единицей выделения памяти



Представления словаря

```
select
  component,
  current_size,
  max_size,
  last_oper_mode,
  last_oper_time,
  granule_size,
  current_size/granule_size as Ratio
from v$sga_dynamic_components
where current_size > 0;
```

Query Result x

SQL | All Rows Fetched: 5 in 0 seconds

	COMPONENT	CURRENT_SIZE	MAX_SIZE	LAST_OPER_MODE	LAST_OPER_TIME	GRANULE_SIZE	RATIO
1	shared pool	419430400	419430400	DEFERRED	04.10.16	16777216	25
2	large pool	33554432	150994944	DEFERRED	27.09.16	16777216	2
3	java pool	16777216	16777216	(null)	(null)	16777216	1
4	DEFAULT buffer cache	553648128	771751936	DEFERRED	04.10.16	16777216	33
5	Shared IO Pool	50331648	50331648	IMMEDIATE	27.09.16	16777216	3

Представления словаря

```
select  
sum(min_size),  
sum(max_size),  
sum(current_size)  
from v$sga_dynamic_components;
```

Query Result x

SQL | All Rows Fetched: 1 in 0,015 seconds

	SUM(MIN_SIZE)	SUM(MAX_SIZE)	SUM(CURRENT_SIZE)
1	855638016	1409286144	1073741824

```
select current_size from v$sga_dynamic_free_memory;
```

Query Result x

SQL | All Rows Fetched: 1 in 0 seconds

	CURRENT_SIZE
1	587202560



Параметры SGA

- **SGA_MAX_SIZE** – указывает максимальный размер памяти

SGA_MAX_SIZE

Property	Description
Parameter type	Big integer
Syntax	<code>SGA_MAX_SIZE = integer [K M G]</code>
Default value	Initial size of SGA at startup, dependent on the sizes of different pools in the SGA, such as buffer cache, shared pool, large pool, and so on.
Modifiable	No
Range of values	0 to operating system-dependent



Параметры SGA

- **SGA_TARGET** – указывает текущий (возможный) размер памяти

SGA_TARGET

Property	Description
Parameter type	Big integer
Syntax	<code>SGA_TARGET = integer [K M G]</code>
Default value	0 (SGA autotuning is disabled for DEFERRED mode autotuning requests, but allowed for IMMEDIATE mode autotuning requests)
Modifiable	ALTER SYSTEM
Range of values	64 MB to operating system-dependent
Basic	Yes



Параметры SGA – изменение

```
SQL> alter system set sga_target=2G;  
alter system set sga_target=2G  
*  
ERROR at line 1:  
ORA-02097: parameter cannot be modified because specified value is invalid  
ORA-00823: Specified value of sga_target greater than sga_max_size
```

```
SQL>  
SQL>  
SQL> show parameter sga
```

NAME	TYPE	VALUE
lock_sga	boolean	FALSE
pre_page_sga	boolean	TRUE
sga_max_size	big integer	1648M
sga_target	big integer	0
unified_audit_sga_queue_size	integer	1048576

```
SQL>  
SQL> alter system set sga_target=128m;
```

System altered.

```
SQL> show parameter sga
```

NAME	TYPE	VALUE
lock_sga	boolean	FALSE
pre_page_sga	boolean	TRUE
sga_max_size	big integer	1648M
sga_target	big integer	128M
unified_audit_sga_queue_size	integer	1048576

```
SQL>
```

```
select sum(bytes) from v$sgastat;
```

```
SUM(BYTES)  
1267342504
```

Структура SGA



Буферный пул

- Буферный пул (буферный кэш) хранит блоки данных табличных пространств
- Блок – единица обмена информацией между оперативной памятью и диском
- С каждым блоком связан счетчик использования
- Списки блоков упорядочены по количеству обращений к блоку



Буферный пул

- Поддерживается два списка блоков:
 - список грязных блоков (отличаются от своей копии на диске и должны быть записаны в табличное пространство)
 - список чистых блоков (не измененные блоки).




Буферный пул

- Алгоритм LRU (least recently used)– первыми вытесняются блоки с наименьшим значением счетчика.
- Запись грязных блоков на диск осуществляется в 4х случаях:
 - 1) истечение тайм-аута (3 сек);
 - 2) контрольная точка;
 - 3) превышение длины грязных блоков заданного лимита;
 - 4) процесс не может обнаружить свободный блок.




Буферный пул – вытеснение блоков

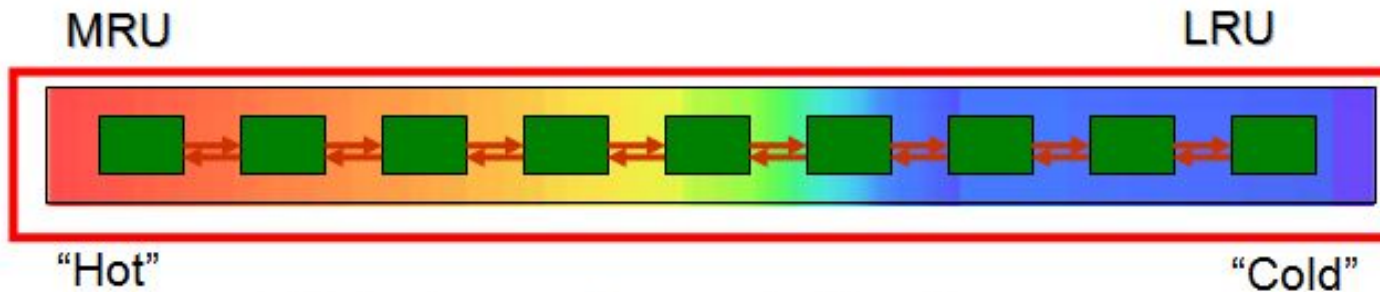

LRU = Least Recently Used
MRU = Most Recently Used



Буферный пул – вытеснение блоков

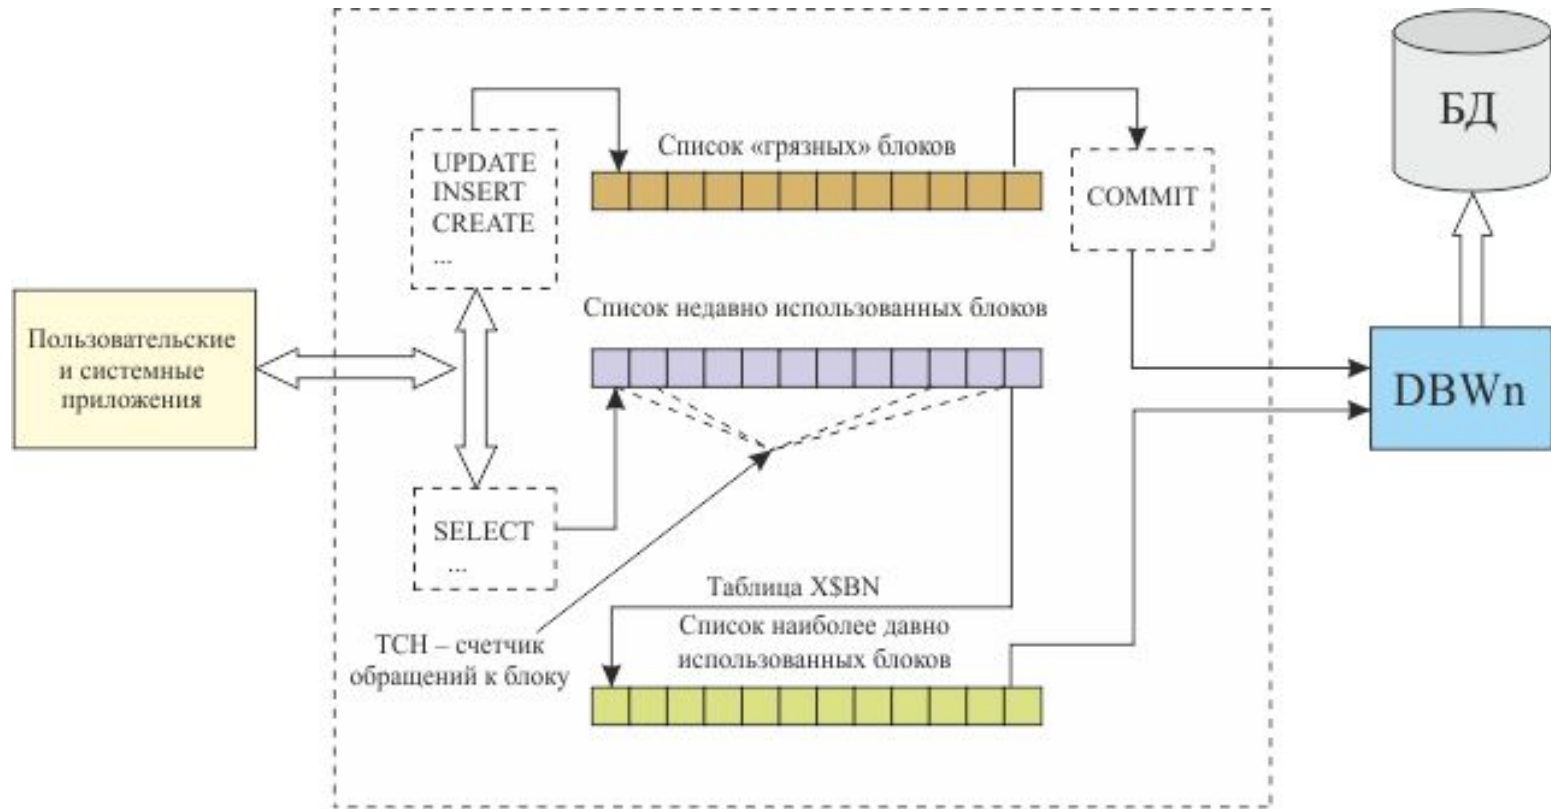

Пулы буферного кэша

- DEFAULT
- KEEP
- RECYCLE

```
select  
component,  
min_size,  
current_size  
from v$sga_dynamic_components;
```

Query Result x

SQL | All Rows Fetched: 15 in 0 seconds

COMPONENT	MIN_SIZE	CURRENT_SIZE
1 shared pool	251658240	419430400
2 large pool	33554432	33554432
3 java pool	16777216	16777216
4 streams pool	0	0
5 DEFAULT buffer cache	553648128	553648128
6 KEEP buffer cache	0	0
7 RECYCLE buffer cache	0	0
8 DEFAULT 2K buffer cache	0	0
9 DEFAULT 4K buffer cache	0	0
10 DEFAULT 8K buffer cache	0	0
11 DEFAULT 16K buffer cache	0	0
12 DEFAULT 32K buffer cache	0	0
13 Shared IO Pool	0	50331648

Параметры пулов буферного кэша

- Устанавливаются
`alter system set ...`
- В файле
параметров

DB_KEEP_CACHE_SIZE

Property	Description
Parameter type	Big integer
Syntax	<code>DB_KEEP_CACHE_SIZE = integer [K M G]</code>
Default value	0 (DB_KEEP_CACHE_SIZE is not configured by default)
Modifiable	ALTER SYSTEM
Range of values	Minimum: 0 (values greater than zero are automatically modified to be either the granule size * number of processor groups, or 4 MB * number of CPUs, whichever is greater) Maximum: operating system-dependent
Basic	No

DB_RECYCLE_CACHE_SIZE

Property	Description
Parameter type	Big integer
Syntax	<code>DB_RECYCLE_CACHE_SIZE = integer [K M G]</code>
Default value	0 (DB_RECYCLE_CACHE_SIZE is not configured by default)
Modifiable	ALTER SYSTEM
Range of values	Minimum: 0 (values greater than zero are automatically modified to be either the granule size * number of processor groups, or 4 MB * number of CPUs, whichever is greater) Maximum: operating system-dependent
Basic	No

DB_CACHE_SIZE

Property	Description
Parameter type	Big integer
Syntax	<code>DB_CACHE_SIZE = integer [K M G]</code>
Default value	If <code>SGA_TARGET</code> is set: If the parameter is not specified, then the default is 0 (internally determined by the Oracle Database). If the parameter is specified, then the user-specified value indicates a minimum value for the memory pool. If <code>SGA_TARGET</code> is not set, then the default is either 48 MB or 4 MB * number of CPUs, whichever is greater
Modifiable	ALTER SYSTEM
Basic	No



Пулы буферного кэша

□ DEFAULT

□ KEEP

□ RECYCLE

```
alter system set db_cache_size=600m scope=spfile;  
alter system set db_keep_cache_size=100m scope=spfile;  
alter system set db_recycle_cache_size=100m scope=spfile;
```



Пулы буферного кэша

```
select component, min_size, current_size, max_size
from v$sga_dynamic_components where component like '%cache%' ;
```


COMPONENT	MIN_SIZE	CURRENT_SIZE	MAX_SIZE
DEFAULT buffer cache	637534208	754974720	771751936
KEEP buffer cache	117440512	117440512	117440512
RECYCLE buffer cache	117440512	117440512	117440512
DEFAULT 2K buffer cache	0	0	0
DEFAULT 4K buffer cache	0	0	0
DEFAULT 8K buffer cache	0	0	0
DEFAULT 16K buffer cache	0	0	0
DEFAULT 32K buffer cache	0	0	0

```
select name, resize_state, block_size, buffers, prev_buffers from v$buffer_pool
```

NAME	RESIZE_STATE	BLOCK_SIZE	BUFFERS	PREV_BUFFERS
KEEP	STATIC	8192	13769	0
RECYCLE	STATIC	8192	13769	0
DEFAULT	STATIC	8192	80546	86548

Пулы буферного кэша

```
create pfile='XXX.ora' from spfile;
```

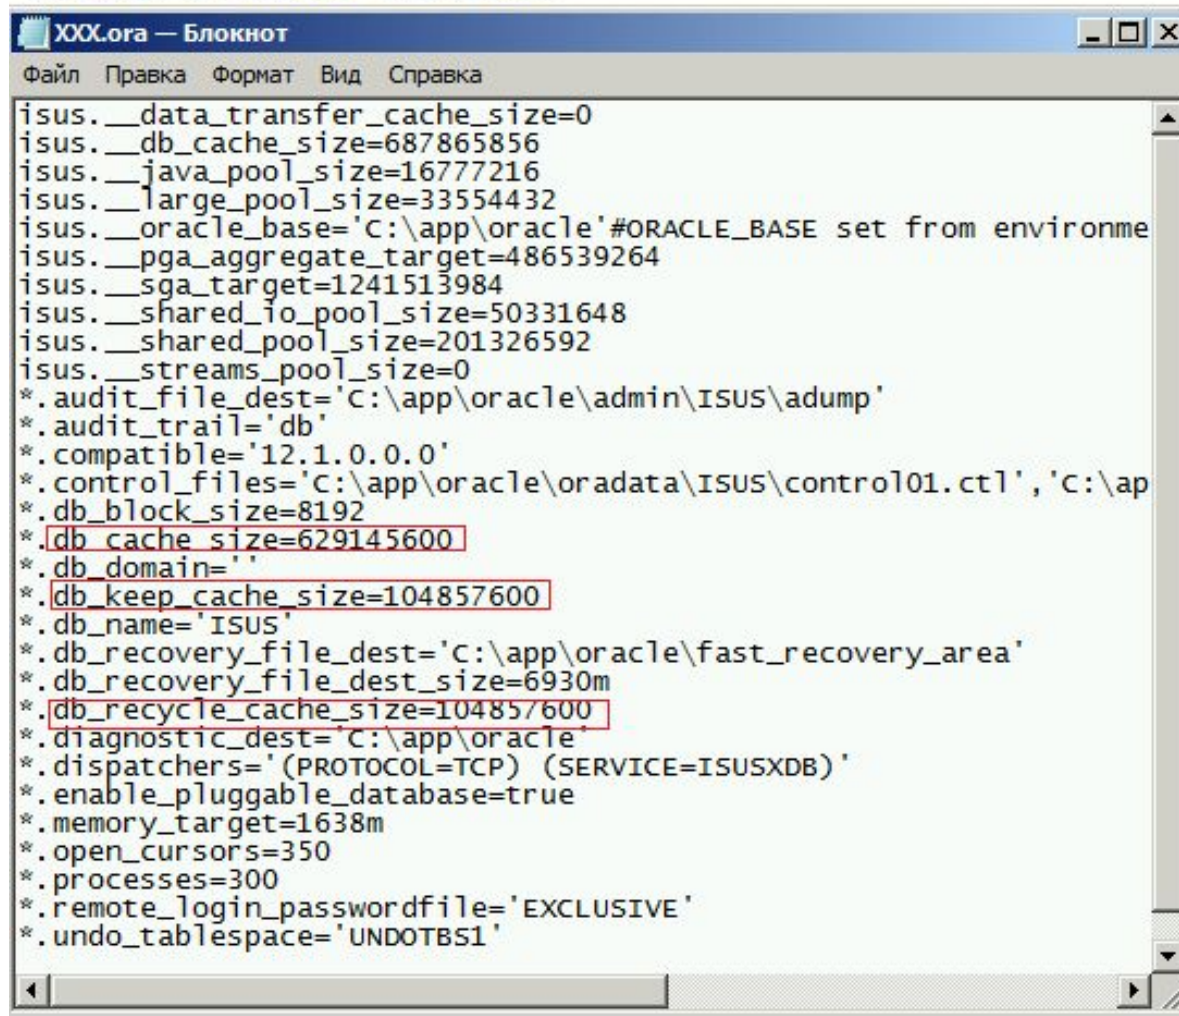

The image shows a Notepad window titled 'XXX.ora — Блокнот'. The window contains a list of Oracle initialization parameters. Three parameters are highlighted with red boxes: 'db_cache_size=629145600', 'db_keep_cache_size=104857600', and 'db_recycle_cache_size=104857600'. The window has a menu bar with 'Файл', 'Правка', 'Формат', 'Вид', and 'Справка'. The text content is as follows:

```
isus.__data_transfer_cache_size=0
isus.__db_cache_size=687865856
isus.__java_pool_size=16777216
isus.__large_pool_size=33554432
isus.__oracle_base='C:\app\oracle'#ORACLE_BASE set from environme
isus.__pga_aggregate_target=486539264
isus.__sga_target=1241513984
isus.__shared_io_pool_size=50331648
isus.__shared_pool_size=201326592
isus.__streams_pool_size=0
*.audit_file_dest='C:\app\oracle\admin\ISUS\adump'
*.audit_trail='db'
*.compatible='12.1.0.0.0'
*.control_files='C:\app\oracle\oradata\ISUS\control01.ctl','C:\ap
*.db_block_size=8192
*.db_cache_size=629145600
*.db_domain=''
*.db_keep_cache_size=104857600
*.db_name='ISUS'
*.db_recovery_file_dest='C:\app\oracle\fast_recovery_area'
*.db_recovery_file_dest_size=6930m
*.db_recycle_cache_size=104857600
*.diagnostic_dest='C:\app\oracle'
*.dispatchers='(PROTOCOL=TCP) (SERVICE=ISUSXDB)'
*.enable_pluggable_database=true
*.memory_target=1638m
*.open_cursors=350
*.processes=300
*.remote_login_passwordfile='EXCLUSIVE'
*.undo_tablespace='UNDOTBS1'
```

Помещение таблицы в определенный пул

```
create table XXX (k int) storage(buffer_pool keep) tablespace users;  
create table YYY (k int) storage(buffer_pool recycle) tablespace users;  
create table zzz (k int) storage(buffer_pool default) tablespace users; -- по умолчанию
```

```
insert into XXX values(1);  
insert into YYY values(1);  
insert into ZZZ values(1);  
commit;
```

```
select segment_name, segment_type, tablespace_name, buffer_pool from user_segments  
where segment_name in('XXX','YYY','ZZZ');
```

SEGMENT_NAME	SEGMENT_TYPE	TABLESPACE_NAME	BUFFER_POOL
XXX	TABLE	USERS	KEEP
YYY	TABLE	USERS	RECYCLE
ZZZ	TABLE	USERS	DEFAULT

CACHE

CACHE – помещение таблицы в конец LRU-списка (для малых таблиц) обычно в default pool

```
create table CCC (k int) cache tablespace users;  
create table CCC1 (k int) cache storage(buffer_pool keep) tablespace users;  
create table CCC2 (k int) cache storage(buffer_pool recycle) tablespace users;
```

```
insert into CCC values(1);  
insert into CCC1 values(1);  
insert into CCC2 values(1);  
commit;
```

```
select segment_name, segment_type, tablespace_name, buffer_pool from user_segments  
where segment_name in('CCC', 'CCC1', 'CCC2');
```

SEGMENT_NAME	SEGMENT_TYPE	TABLESPACE_NAME	BUFFER_POOL
CCC	TABLE	USERS	DEFAULT
CCC1	TABLE	USERS	KEEP
CCC2	TABLE	USERS	RECYCLE



Структура SGA



Буфер журналов повторного выполнения

- Буфер журнала повторного выполнения предназначен для временного хранения данных журнала повтора;
- Позволяет ускорить работу сервера за счет буферизации;
- Содержимое сбрасывается на диск (в журнал повтора) в 4-х случаях:
 - 1) каждые три секунды;
 - 2) при фиксации транзакции;
 - 3) при заполнении буфера на 1/3;
 - 4) если в буфере более 1m данных журнала повтора.



Параметр LOG_BUFFER

LOG_BUFFER

Property	Description
Parameter type	Integer
Default value	5 MB to 32 MB, depending on the size of the SGA, CPU count, and whether the operating system is 32-bit or 64-bit
Modifiable	No
Range of values	2 MB to operating system-dependent
Basic	No

```
show parameter log_buffer
```

NAME	TYPE	VALUE
log_buffer	integer	6344704



Ожидание освобождения буфера журналов повтора

- Redo buffer allocation retries – статистика – количество случаев ожидания процессами освобождения буфера журнала повтора:
 - буфер занят,
 - процесс LGWR не сбросил данные на диск,
 - процесс ждет освобождения буфера для записи информации об изменении базы данных.

Значение должно быть равно 0, иначе надо увеличивать размер буфера.

```
select name, value from v$sysstat where name like '%redo%retries'
```

NAME	VALUE
redo buffer allocation retries	0



Изменения размеров буфера журналов повтора

```
ORACLE instance shut down.
SQL> startup;
ORACLE instance started.

Total System Global Area 1720328192 bytes
Fixed Size                 2403496 bytes
Variable Size              838861656 bytes
Database Buffers          872415232 bytes
Redo Buffers               6647808 bytes
Database mounted.
Database opened.
SQL> shutdown immediate;
Database closed.
Database dismounted.
ORACLE instance shut down.
SQL>
SQL>
SQL> startup;
ORACLE instance started.


Total System Global Area 1720328192 bytes
Fixed Size                 2403496 bytes
Variable Size              838861656 bytes
Database Buffers          872415232 bytes
Redo Buffers               6647808 bytes
Database mounted.
Database opened.
SQL> show parameter log_buffer

NAME                                TYPE                                VALUE
-----                                -
log_buffer                           integer                             1048576
SQL> shutdown immediate;
Database closed.
Database dismounted.
ORACLE instance shut down.
SQL> startup;
ORACLE instance started.

Total System Global Area 1720328192 bytes
Fixed Size                 2403496 bytes
Variable Size              822084440 bytes
Database Buffers          872415232 bytes
Redo Buffers               23425024 bytes
Database mounted.
Database opened.
SQL> show parameter log_buffer

NAME                                TYPE                                VALUE
-----                                -
log_buffer                           integer                             8388608
SQL> _
```

Файл параметров

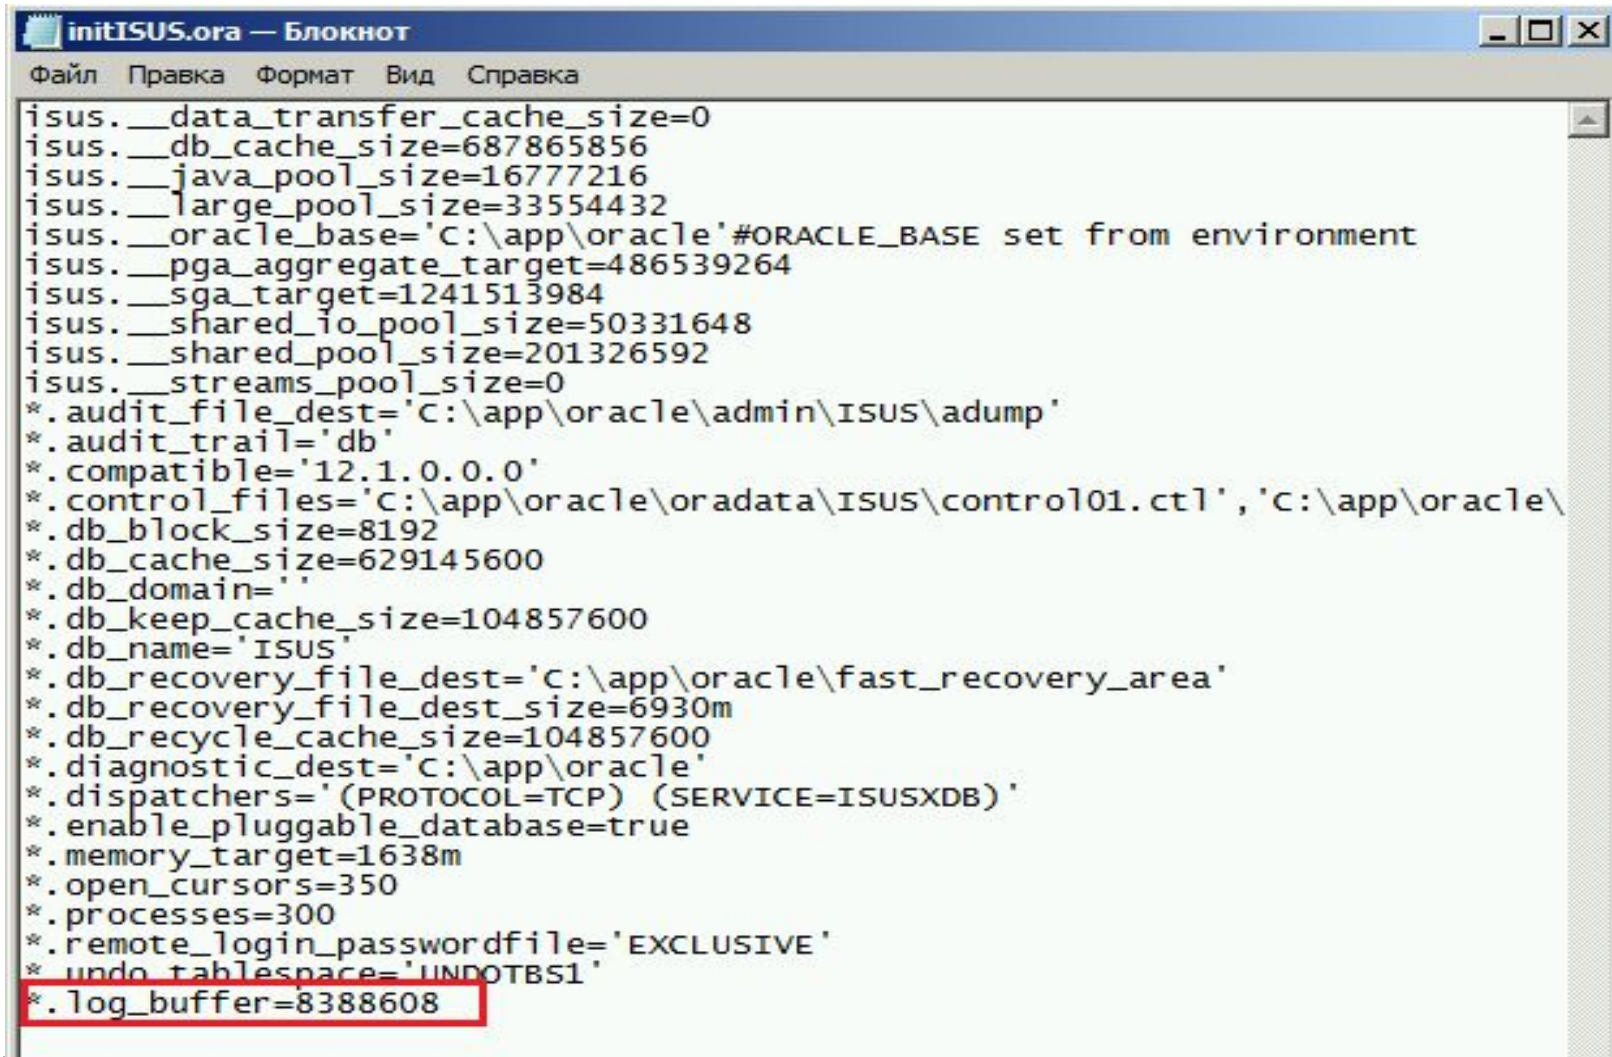

```
initISUS.ora — Блокнот
Файл  Правка  Формат  Вид  Справка
isus.__data_transfer_cache_size=0
isus.__db_cache_size=687865856
isus.__java_pool_size=16777216
isus.__large_pool_size=33554432
isus.__oracle_base='C:\app\oracle'#ORACLE_BASE set from environment
isus.__pga_aggregate_target=486539264
isus.__sga_target=1241513984
isus.__shared_io_pool_size=50331648
isus.__shared_pool_size=201326592
isus.__streams_pool_size=0
*.audit_file_dest='C:\app\oracle\admin\ISUS\adump'
*.audit_trail='db'
*.compatible='12.1.0.0.0'
*.control_files='C:\app\oracle\oradata\ISUS\control01.ctl','C:\app\oracle\
*.db_block_size=8192
*.db_cache_size=629145600
*.db_domain=''
*.db_keep_cache_size=104857600
*.db_name='ISUS'
*.db_recovery_file_dest='C:\app\oracle\fast_recovery_area'
*.db_recovery_file_dest_size=6930m
*.db_recycle_cache_size=104857600
*.diagnostic_dest='C:\app\oracle'
*.dispatchers='(PROTOCOL=TCP) (SERVICE=ISUSXDB)'
*.enable_pluggable_database=true
*.memory_target=1638m
*.open_cursors=350
*.processes=300
*.remote_login_passwordfile='EXCLUSIVE'
*.undo_tablespace='UNDOTBS1'
*.log_buffer=8388608
```

Структура SGA



Фиксированная область SGA

- хранит переменные, указывающие на другие области памяти, значения параметров;
- представляет собой загрузочный бинарный код;
- размер области зависит от платформы, версии операционной системы;
- размером фиксированной области SGA управлять нельзя.



Структура SGA



Разделяемый пул

- Разделяемый пул предназначен для кэширования данных – планов запросов, кэш словаря.

```
select  
  component,  
  min_size,  
  current_size,  
  max_size  
from v$sga_dynamic_components  
where component = 'shared pool';
```

Query Result x

SQL | All Rows Fetched: 1 in 0 seconds

	COMPONENT	MIN_SIZE	CURRENT_SIZE	MAX_SIZE
1	shared pool	251658240	419430400	419430400

Управление размером разделяемого пула

- Устанавливаются
alter system set ...
- В файле параметров

```
SQL> show parameter shared_pool
```

NAME	TYPE	VALUE
shared_pool_reserved_size	big integer	9227468
shared_pool_size	big integer	0

```
SQL> _
```

```
SQL> alter system set shared_pool_size=180m;
```

System altered.

```
SQL> show parameter shared_pool
```

NAME	TYPE	VALUE
shared_pool_reserved_size	big integer	9227468
shared_pool_size	big integer	192M

```
SQL>
```

SHARED_POOL_SIZE

Property	Description
Parameter type	Big integer
Syntax	SHARED_POOL_SIZE = integer [K M G]
Default value	<p>If SGA_TARGET is set: If the parameter is not specified, then the default is 0 (internally determined by the Oracle Database). If the parameter is specified, then the user-specified value indicates a minimum value for the memory pool.</p> <p>If SGA_TARGET is not set (32-bit platforms): 64 MB, rounded up to the nearest granule size.</p> <p>If SGA_TARGET is not set (64-bit platforms): 128 MB, rounded up to the nearest granule size.</p> <p>For considerations when dealing with database instances using ASM, see "SHARED_POOL_SIZE and Automatic Storage Management".</p>
Modifiable	ALTER SYSTEM
Range of values	Minimum: the granule size Maximum: operating system-dependent

Управление размером разделяемого пула

```
SQL> alter system set shared_pool_size=204m;
```

```
System altered.
```

```
SQL> show parameter shared_pool
```

NAME	TYPE	VALUE
shared_pool_reserved_size	big integer	9227468
shared_pool_size	big integer	208M

```
SQL> _
```

```
select component, min_size, current_size, max_size  
from v$sga_dynamic_components where component = 'shared pool' ;
```

COMPONENT	MIN_SIZE	CURRENT_SIZE	MAX_SIZE
shared pool	167772160	218103808	218103808



Объекты в разделяемом пуле

```
select pool, name, bytes from v$sgastat where pool = 'shared pool';
```

R#	POOL	R#	NAME	R#	BYTES
1	shared pool		db_files		453448
2	shared pool		KCFIS SGA		8
3	shared pool		KTC txn rsrc cnt		88
4	shared pool		os statistics		13096
5	shared pool		kdlxdup swapp		24
6	shared pool		KGLH0		10407544
7	shared pool		KQF optimizer stats table		2224
8	shared pool		namrec_kfdsg		24
9	shared pool		object temp hash table 1a		163840
.0	shared pool		keomm:emptyMon_keommSg		7168
.1	shared pool		object level stat table		1056
.2	shared pool		kgnfs gid list		104
.3	shared pool		HM_MESSAGE		1504
.4	shared pool		PQ/ResSched		32784
.5	shared pool		generic process shared st		16
.6	shared pool		KTSJ state object		1408
.7	shared pool		SGA structure for kelr		2456
.8	shared pool		KKJ SHRD WRQS		240
.9	shared pool		zafwctx		40608
.10	shared pool		zlllab Group Tree Heap De		160
.11	shared pool		KSTP SGA		160

```
select count(*) from v$sgastat  
where pool = 'shared pool';
```

Query Result x

SQL | All Rows Fetched: 1 in 0 seconds

	COUNT(*)
1	1201

Структура SGA



Большой пул

- Большой пул - область памяти SGA, применяемая для хранения больших фрагментов памяти.
- В этой области не применяется вытеснение по алгоритму LRU,
- память становится свободной сразу после того, как перестает использоваться,
- аналог RECYCLE, а разделяемый пул в этом смысле - KEEP,
- хранятся данные при резервном копировании (RMAN), специальные области UGA и пр.



Большой пул

```
select  
pool,  
name,  
bytes  
from v$sgastat  
where pool = 'large pool';
```

Query Result x

SQL | All Rows Fetched: 10 in 0 seconds

	POOL	NAME	BYTES
1	large pool	PX msg pool	491520
2	large pool	SWRF Metric Eidbuf	368640
3	large pool	SWRF Metric CHBs	1802240
4	large pool	SWRF Metric Eidbuf	368640
5	large pool	SWRF Metric CHBs	1802240
6	large pool	SWRF Metric CHBs	1802240
7	large pool	free memory	24379392
8	large pool	SWRF Metric CHBs	1802240
9	large pool	SWRF Metric Eidbuf	368640
10	large pool	SWRF Metric Eidbuf	368640

```
select  
component,  
min_size,  
current_size,  
max_size  
from v$sga_dynamic_components  
where component = 'large pool';
```

Query Result x

SQL | All Rows Fetched: 1 in 0 seconds

	COMPONENT	MIN_SIZE	CURRENT_SIZE	MAX_SIZE
1	large pool	33554432	33554432	150994944

Большой пул – параметры

LARGE_POOL_SIZE

Property	Description
Parameter type	Big integer
Syntax	<code>LARGE_POOL_SIZE = integer [K M G]</code>
Default value	<p>If <code>SGA_TARGET</code> is set, but a value is not specified for <code>LARGE_POOL_SIZE</code>, then the default is 0 (internally determined by the Oracle database). If <code>LARGE_POOL_SIZE</code> is specified, then the user-specified value indicates a minimum value for the memory pool.</p> <p>If <code>SGA_TARGET</code> is not set, 0 if both of the following are true:</p> <ul style="list-style-type: none">• The pool is not required by parallel execution• <code>DBWR_IO_SLAVES</code> is not set <p>Otherwise, derived from the values of <code>PARALLEL_MAX_SERVERS</code>, <code>PARALLEL_THREADS_PER_CPU</code>, <code>CLUSTER_DATABASE_INSTANCES</code>, <code>DISPATCHERS</code>, and <code>DBWR_IO_SLAVES</code>.</p>
Modifiable	ALTER SYSTEM
Range of values	Minimum: the granule size Maximum: operating system-dependent
Basic	No

```
show parameter large_pool
```

NAME	TYPE	VALUE
large_pool_size	big integer	0

Большой пул – параметры

```
SQL>
SQL>
SQL> alter system set large_pool_size=2m;
System altered.
SQL> show parameter large_pool
NAME                                TYPE                                VALUE
-----
large_pool_size                      big integer 16M
SQL> alter system set large_pool_size=18m;
System altered.
SQL> show parameter large_pool
NAME                                TYPE                                VALUE
-----
large_pool_size                      big integer 32M
SQL> _
```

```
select component, min_size, current_size, max_size
from v$sga_dynamic_components where component = 'large pool' ;
```

COMPONENT	MIN_SIZE	CURRENT_SIZE	MAX_SIZE
large pool	33554432	33554432	150994944

Структура SGA



Java-пул

- Java-пул предназначен для работы Java-машины;

```
select
  component,
  min_size,
  current_size,
  max_size
from v$sga_dynamic_components
where component = 'java pool';
```

Query Result x

SQL | All Rows Fetched: 1 in 0 seconds

COMPONENT	MIN_SIZE	CURRENT_SIZE	MAX_SIZE
1 java pool	16777216	16777216	16777216

```
select
  pool,
  name,
  bytes
from v$sgastat
where pool = 'java pool';
```

Query Result x

SQL | All Rows Fetched: 1 in 0 seconds

POOL	NAME	BYTES
1 java pool	free memory	16777216

Параметры Java-пула

JAVA_POOL_SIZE

Property	Description
Parameter type	Big integer
Syntax	<code>JAVA_POOL_SIZE = integer [K M G]</code>
Default value	If <code>SGA_TARGET</code> is set: If the parameter is not specified, then the default is 0 (internally determined by the Oracle Database). If the parameter is specified, then the user-specified value indicates a minimum value for the memory pool. If <code>SGA_TARGET</code> is not set: 24 MB, rounded up to the nearest granule size
Modifiable	<code>ALTER SYSTEM</code>
Range of values	Minimum: 0 (values greater than zero are rounded up to the nearest granule size) Maximum: operating system-dependent
Basic	No

```
show parameter java_pool_size
```

NAME	TYPE	VALUE
-----	-----	-----
java_pool_size	big integer	0

```
SQL>
SQL> alter system set java_pool_size=18m;
System altered.
SQL> show parameter java_pool
NAME                                TYPE                                VALUE
-----                                -----                                -----
java_pool_size                       big integer                          32M
SQL>
SQL>
```

Вопросы?

